

GARDEN TOOLS



2025

PRODUCT CATALOGUE




COMPANY PROFILE

Fuzhou Teamax Power Technology Co.,Ltd

Fuzhou Teamax Power Technology Co.,Ltd specializes in producing various types of gardening and agriculture tools & machinery, which mainly include brush cutters, chainsaws, water pumps, lawn mowers, hedge trimmer, earth augers, power sprayers, blowers and so on. Our products are widely used in home & garden, public parks, sporting and agricultural land. With an enriched products portfolio of features, sizes and uses, we can satisfy our clients requirements in the work force or at home.



We have an advanced enterprise management philosophy and a strict quality control system. Equipped with advanced inspection and testing facilities in the manufacturing process, we aim to provide high quality products for our global partners. Our technology centers have setup long-term strategic partnerships with several national professional organizations. We are committed to continuously enhancing the quality and performance of "TEAMAX" power products, ensuring the company will always occupy the leading position in the industry.

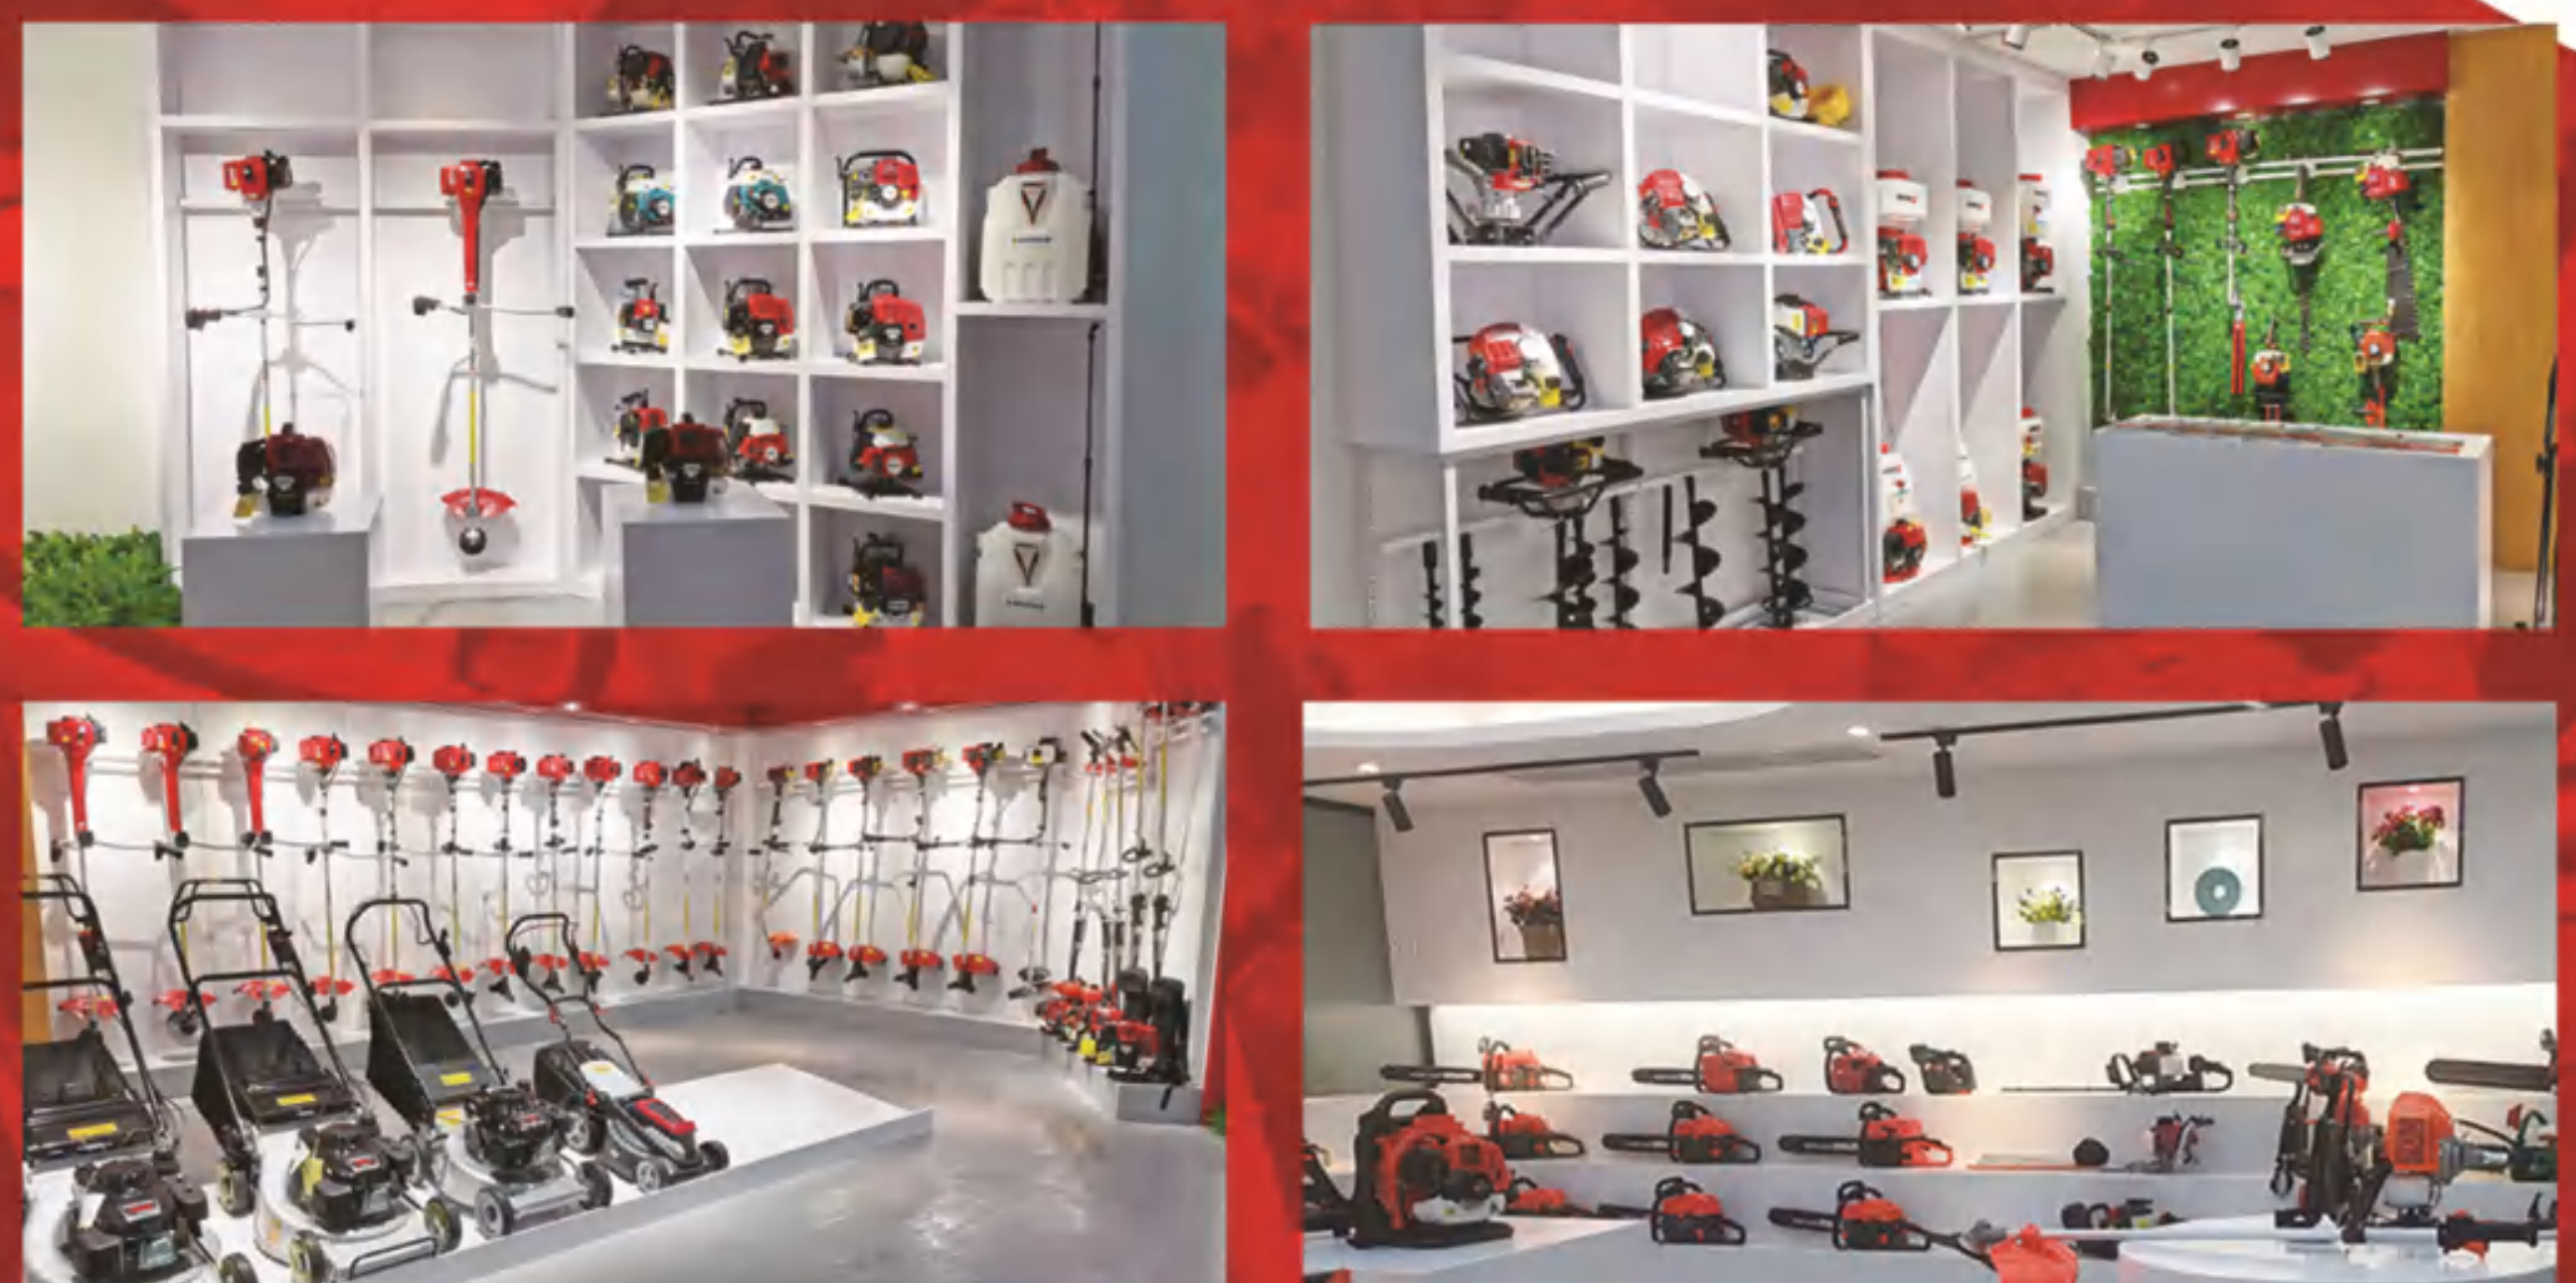



COMPANY CULTURE

Spirit: Be transnormal, creative & top-class.

Vision: Create world brand, serve the globe.

Promise: Listen patiently, respond quickly, fulfill strenuously.

Quality: Focus, commitment to excellence, be more professional and sophisticated.

Contents

BRUSH CUTTER	2
HIGH BRANCH SAW	12
HAND PUSH BRUSH CUTTER	13
GASOLINE CHAIN SAW	15
ENGINE LAWN MOWER	23
EARTH AUGER	27
GASOLINE ENGINE	29
HEDGE TRIMMER	32
MINI TILLER	33
GASOLINE BLOWER	34
OUTBOARD ENGINE	36
ELECTRIC GRASS TRIMMER	37
ELECTRIC CHAIN SAW	38
CORDLESS BRUSH CUTTER	49
CORDLESS CHAIN SAW	53
CORDLESS PRUNING SCISSOR	58
CORDLESS POLE SCISSOR AND SAW	60
CORDLESS HEDGE TRIMMER	61
CORDLESS LAWN MOWER	62
CORDLESS MINI TILLER	63
CORDLESS TURBO BLOWER	64
CORDLESS CAR WASHER	67



TM-CG260

(Basic Model)



Model No.	TM-CG260
Engine Model	1E34F
Engine Type	2-Stroke,Air-cooled
Rated Output power	0.75kw/7500rpm
Displacement	25.4cc
Idling Speed	3200(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	750ml
Shaft Diameter	26mm
Working Shaft Length	1500mm

TM-CG330

(Basic Model)



Model No.	TM-CG330
Engine Model	1E36F
Engine Type	2-Stroke,Air-cooled
Rated Output power	0.9kw/6500rpm
Displacement	32.6cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	900ml
Shaft Diameter	26mm
Working Shaft Length	1500mm

TM-CG430

(Basic Model)



Model No.	TM-CG430
Engine Model	1E40F-5
Engine Type	2-Stroke,Air-cooled
Rated Output power	1.40kw/6500rpm
Displacement	42.7cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1200ml
Shaft Diameter	28mm
Working Shaft Length	1500mm

TM-CG520

(Basic Model)



Model No.	TM-CG520
Engine Model	1E44F-5
Engine Type	2-Stroke,Air-cooled
Rated Output power	1.80kw/6500rpm
Displacement	51.7cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1200ml
Shaft Diameter	28mm
Working Shaft Length	1500mm

TM-CG520B
(Basic Model)



Model No.	TM-CG520B
Engine Model	1E44F-5B
Engine Type	2-Stroke, Air-cooled
Rated Output power	1.80kw/6500rpm
Displacement	51.7cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	750ml
Shaft Diameter	28mm
Working Shaft Length	1500mm

TM-CG520TB
(Basic Model)



Model No.	TM-CG520TB
Engine Model	TB52
Engine Type	2-Stroke, Air-cooled
Rated Output power	1.80kw/6500rpm
Displacement	51.7cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1200ml
Shaft Diameter	28mm
Working Shaft Length	1500mm

DIFFERENT DESIGNS FOR 43/52cc ENGINE



TM-CG520TU



TM-CG520E



TM-CG520F



TM-CG520G



TM-CG520J



TM-CG520K



TM-CG520N



TM-CG520T

TM-CG520BV

(Anti-Vibration)



TM-CG520TBV

(Anti-Vibration)



TM-CG630A

(63cc Model)



TM-CG630TB

(63cc Model)


Model No.
TM-CG520BV

Engine Model	1E44F-5B
Engine Type	2-Stroke, Air-cooled
Rated Output power	1.80kw/6500rpm
Displacement	51.7cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	750ml
Shaft Diameter	26mm
Working Shaft Length	1500mm

Model No.
TM-CG520TBV

Engine Model	TB52
Engine Type	2-Stroke, Air-cooled
Rated Output power	1.80kw/6500rpm
Displacement	51.7cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1200ml
Shaft Diameter	28mm
Working Shaft Length	1500mm

Model No.
TM-CG630A

Engine Model	1E48F
Engine Type	2-Stroke, Air-cooled
Rated Output power	2.4kw/6500rpm
Displacement	63cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1200ml
Shaft Diameter	28mm
Working Shaft Length	1500mm

Model No.
TM-CG630TB

Engine Model	1E48F-5B
Engine Type	2-Stroke, Air-cooled
Rated Output power	2.4kw/6500rpm
Displacement	63cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1200ml
Shaft Diameter	28mm
Working Shaft Length	1500mm

TM-CG139



TM-CG139B



TM-CG435 (Honda Model)



TM-CG450 (Honda Model)



Model No.

TM-CG139

Engine Model	139F
Engine Type	4-Stroke,Air-cooled
Rated Output power	0.75kw/7500rpm
Displacement	31cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	630ml
Shaft Diameter	26mm
Working Shaft Length	1500mm

Model No.

TM-CG139B

Engine Model	139F-2
Engine Type	4-Stroke,Air-cooled
Rated Output power	0.75kw/7500rpm
Displacement	31cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	630ml
Shaft Diameter	26mm
Working Shaft Length	1500mm

Model No.

TM-CG435

Engine Model	GX35
Engine Type	4-Stroke,Air-cooled
Rated Output power	1.0kw/6500rpm
Displacement	35.8cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	630ml
Shaft Diameter	28mm
Working Shaft Length	1500mm

Model No.

TM-CG450

Engine Model	GX50
Engine Type	4-Stroke,Air-cooled
Rated Output power	1.5kw/6500rpm
Displacement	50cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	750ml
Shaft Diameter	28mm
Working Shaft Length	1500mm

TM-CG226R

(Husqvarna Model)



Model No.	TM-CG226R
Engine Model	G26
Engine Type	2-Stroke,Air-cooled
Rated Output power	1.60kw/6500rpm
Displacement	41.5cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1000ml
Shaft Diameter	28mm
Working Shaft Length	1500mm

TM-CG143R

(Husqvarna Model)



Model No.	TM-CG143R
Engine Model	G45
Engine Type	2-Stroke,Air-cooled
Rated Output power	1.60kw/6500rpm
Displacement	41.5cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1000ml
Shaft Diameter	28mm
Working Shaft Length	1500mm

TM-CG541R

(Husqvarna Model)



Model No.	TM-CG541R
Engine Model	541R
Engine Type	2-Stroke,Air-cooled
Rated Output power	1.60kw/6500rpm
Displacement	41.5cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1000ml
Shaft Diameter	28mm
Working Shaft Length	1500mm

TM-CG553R

(Husqvarna Model)



Model No.	TM-CG553R
Engine Model	G53
Engine Type	2-Stroke,Air-cooled
Rated Output power	2.40kw/6500rpm
Displacement	50.6cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1000ml
Shaft Diameter	28mm
Working Shaft Length	1500mm

TM-CG411

(Robin model)



TM-RBC411

(Makita model)



TM-C230

(Shindaiwa model)



TM-CGB45

(Shindaiwa model)



Model No.	TM-CG411
Engine Model	1E40F-6(Robin)
Engine Type	2-Stroke, Air-cooled
Rated Output power	1.45kw/6500rpm
Displacement	40.2cc
Idling Speed	3000(±200)rpm
Carburetor	Floating Type
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1000ml
Shaft Diameter	28mm
Working Shaft Length	1500mm

Model No.	TM-RBC411
Engine Model	1E40F-6(Makita)
Engine Type	2-Stroke, Air-cooled
Rated Output power	1.45kw/6500rpm
Displacement	40.2cc
Idling Speed	3000(±200)rpm
Carburetor	Floating Type
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1000ml
Shaft Diameter	28mm
Working Shaft Length	1500mm

Model No.	TM-C230
Engine Model	C230
Engine Type	2-Stroke, Air-cooled
Rated Output power	0.75kw/7500rpm
Displacement	22.5cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	750ml
Shaft Diameter	26mm
Working Shaft Length	1500mm

Model No.	TM-CGB45
Engine Model	B450
Engine Type	2-Stroke, Air-cooled
Rated Output power	2.2kw/6500rpm
Displacement	41.5cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	900ml
Shaft Diameter	28mm
Working Shaft Length	1500mm

TM-CG400

(Kawasaki model)



Model No.

TM-CG400

Engine Model	1E40F-7
Engine Type	2-Stroke, Air-cooled
Rated Output power	1.40kw/6500rpm
Displacement	40.7cc
Idling Speed	3000(±200)rpm
Carburetor	Floating Type
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1000ml
Shaft Diameter	28mm
Working Shaft Length	1500mm

TM-CTJ45E

(Kawasaki model)



Model No.

TM-CTJ45E

Engine Model	TJ45E
Engine Type	2-Stroke, Air-cooled
Rated Output power	1.45kw/7500rpm
Displacement	45.4cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1100ml
Shaft Diameter	28mm
Working Shaft Length	1500mm

TM-CTJ53E

(Kawasaki model)



Model No.

TM-CTJ53E

Engine Model	TJ53E
Engine Type	2-Stroke, Air-cooled
Rated Output power	2.0kw/7500rpm
Displacement	53.2cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1100ml
Shaft Diameter	28mm
Working Shaft Length	1500mm

TM-BG328



Model No.	TM-BG328
Engine Model	1E36FB
Engine Type	2-Stroke,Air-cooled
Rated Output power	0.81kw/6500rpm
Displacement	30.5cc
Idling Speed	3000(±200)rpm
Carburetor	Float
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1500ml
Shaft Diameter	26mm
Working Shaft Length	1350mm

TM-BG520A



Model No.	TM-BG520A
Engine Model	1E44F-5
Engine Type	2-Stroke,Air-cooled
Rated Output power	1.8kw/6500rpm
Displacement	51.7cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1200ml
Shaft Diameter	26mm
Working Shaft Length	1350mm

TM-BG520TB



Model No.	TM-BG520TB
Engine Model	1E44F-5
Engine Type	2-Stroke,Air-cooled
Rated Output power	1.8kw/6500rpm
Displacement	51.7cc
Idling Speed	3000(±200)rpm
Carburetor	Float
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1200ml
Shaft Diameter	26mm
Working Shaft Length	1350mm

TM-BG520H



Model No.	TM-BG520H
Engine Model	1E44F-5
Engine Type	2-Stroke,Air-cooled
Rated Output power	1.8kw/6500rpm
Displacement	51.7cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1200ml
Shaft Diameter	26mm
Working Shaft Length	1350mm

TM-BG435



Model No.	TM-BG435
Engine Model	GX35
Engine Type	4-Stroke, Air-cooled
Rated Output power	1.1kw/6500rpm
Displacement	35.8cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1200ml
Shaft Diameter	26mm
Working Shaft Length	1350mm

TM-BG143



Model No.	TM-BG143
Engine Model	143R
Engine Type	2-Stroke, Air-cooled
Rated Output power	1.6kw/6500rpm
Displacement	41.5cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1200ml
Shaft Diameter	26mm
Working Shaft Length	1350mm

TM-BTJ53E (Kawasaki model)



Model No.	TM-BTJ53E
Engine Model	TJ53E
Engine Type	2-Stroke, Air-cooled
Rated Output power	2.0kw/7500rpm
Displacement	53.2cc
Idling Speed	3000(±200)rpm
Carburetor	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1100ml
Shaft Diameter	26mm
Working Shaft Length	1350mm



TM-MT520

Model No.	TM-MT520
Engine Model	1E40F-5
Engine Type	2-Stroke, Air-cooled
Rated Output power	1.80kw/6500rpm
Displacement	52cc

Multi purpose working head:



WEEDER-01



WEEDER-02



WEEDER-03



WEEDER-04



WEEDER-05



WEEDER-06



TILLER-01



TILLER-02



TILLER-03



90° CHAINSAW



PUMP



SWEEPER



HARVERSTER-01



HARVERSTER-02



HARVERSTER-03



HARVESTERS-04





COFFEE HARVESTERS SINGLE



COFFEE HARVESTERS DOUBLE

TM-HTP26

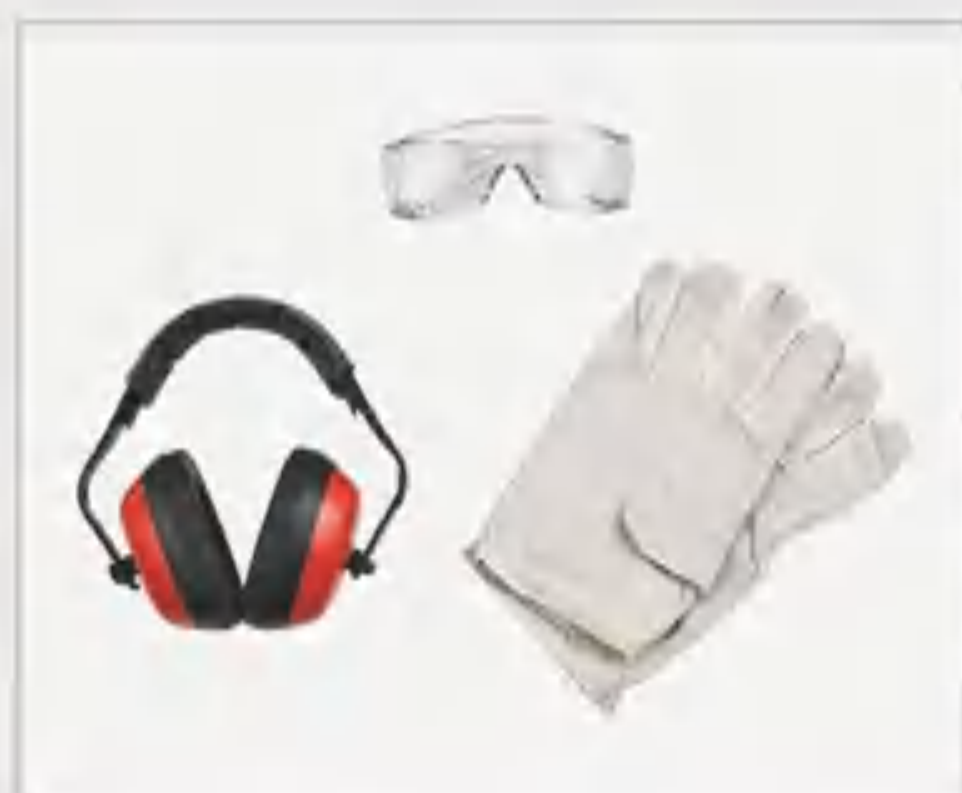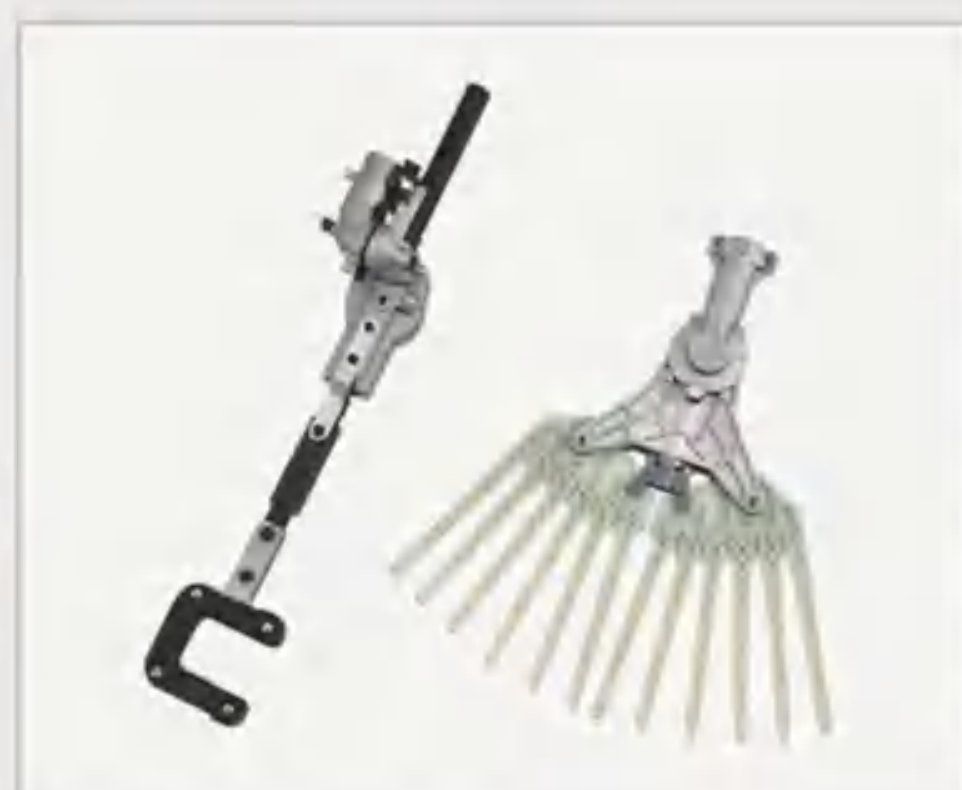

SUPERIOR QUALITY
**MULTI FUNCTIONAL HIGH
BRANCH SAW**

STRONG
POWER

STABLE
RELIABLE

ENERGY
SAVING

Model No.	TM-HTP26
Engine Model	1E34F or TU26
Engine Type	2-Stroke, Air-cooled
Rated Output power	0.75kw/7500rpm
Displacement	26cc
Idling Speed	3000(±200)rpm
Telescopic scope	2.2m-4.5m

High quality multi-function high branch saw, small size, light weight, convenient operation, suitable for efficient and flexible mowing on steep slopes



TM-WBC520A

Model No.	TM-WBC520A
Engine model	1E44F-5
Engine type	2-Stroke air-cooled
Rated power	1.8kw/6500rpm
Displacement	51.7cc
Idling Speed	3000(±200)rpm
Net weight	18.0kg



TM-WBC435

Model No.	TM-WBC435
Engine model	GX35
Engine type	4-Stroke air-cooled
Rated power	1.1kw/6500rpm
Displacement	35.8cc
Idling Speed	3000(±200)rpm
Net weight	18.0kg



TM-WBC520B

Model No.	TM-WBC520B
Engine model	1E44F-5
Engine type	2-Stroke air-cooled
Rated power	1.8kw/6500rpm
Displacement	51.7cc
Idling Speed	3000(±200)rpm
Net weight	18.0kg



TM-WBC520C

Model No.	TM-WBC520C
Engine model	1E44F-5
Engine type	2-Stroke air-cooled
Rated power	1.8kw/6500rpm
Displacement	51.7cc
Idling Speed	3000(±200)rpm
Net weight	18.0kg





TM-CS5819



SPECIFICATION

Cylinder Bore:	Ø45.2mm	Guide Bar Size:	20"(50cm)/22"(55cm)
Engine Type:	2-Stroke, Air-cooled	Chain Pitch:	0.325"
Rated Output Power:	2.8kw/7500rpm	Fuel Tank Capacity:	550ml
Displacement:	58cc (Option 45cc, 52cc, 62cc)	Oil Tank Capacity:	260ml
Idling Speed:	3300(±200)rpm	N.W.:	5.0KGS



TM-CS6220



SPECIFICATION

Cylinder Bore:	Ø47mm	Guide Bar Size:	20"(50cm)/22"(55cm)
Engine Type:	2-Stroke, Air-cooled	Chain Pitch:	0.325"
Rated Output Power:	3.0kw/7500rpm	Fuel Tank Capacity:	550ml
Displacement:	62cc	Oil Tank Capacity:	260ml
Idling Speed:	3300(±200)rpm	N.W.:	5.0KGS





TM-CS2500



Rated Output Power: **0.9kw/7500rpm**
 Displacement: **25.4cc**
 Guide Bar Size: **10"(25cm)/12"(30cm)**



TM-CS2511



Rated Output Power: **1.1kw/7500rpm**
 Displacement: **25cc**
 Guide Bar Size: **10"(25cm)/12"(30cm)**



TM-CS3800



Rated Output Power: **1.4kw/7500rpm**
 Displacement: **38.2cc**
 Guide Bar Size: **14"(35cm)/16"(40cm)**



TM-CS4000



Rated Output Power: **1.6kw/7500rpm**
 Displacement: **39.6cc**
 Guide Bar Size: **16"(40cm)**



TM-CS4500



Rated Output Power: **1.8kw/7500rpm**
 Displacement: **45cc**
 Guide Bar Size: **16"(40cm)/18"(45cm)**



TM-CS5200



Rated Output Power: **2.2kw/7500rpm**
 Displacement: **52cc**
 Guide Bar Size: **18"(45cm)/20"(50cm)**



TM-CS5201



Rated Output Power: **2.2kw/7500rpm**
 Displacement: **52cc (Option 45cc, 58cc, 62cc)**
 Guide Bar Size: **18"(45cm)/20"(50cm)**



TM-CS5202



Rated Output Power: **2.2kw/7500rpm**
 Displacement: **52cc (Option 45cc, 58cc, 62cc)**
 Guide Bar Size: **18"(45cm)/20"(50cm)**



TM-CS5800



Rated Output Power: **2.4kw/7500rpm**
 Displacement: **58cc (Option 45cc, 52cc, 62cc)**
 Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5801



Rated Output Power: **2.4kw/7500rpm**
 Displacement: **58cc (Option 45cc, 52cc, 62cc)**
 Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5802



Rated Output Power: **2.4kw/7500rpm**
 Displacement: **58cc (Option 45cc, 52cc, 62cc)**
 Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5803



Rated Output Power: **2.4kw/7500rpm**
 Displacement: **58cc (Option 45cc, 52cc, 62cc)**
 Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5804



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5805



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5806



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5807



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5808



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5809



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5810



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5811



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5812



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5813



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5814



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5815



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS180



Rated Output Power: 1.5kw/9000rpm

Displacement: 31.8cc

Guide Bar Size: 14"(35cm)/16"(40cm)



TM-CS250



Rated Output Power: 2.3kw/8500rpm

Displacement: 45.8cc

Guide Bar Size: 16"(40cm)/18"(45cm)



TM-CS381



Rated Output Power: 3.3kw/7000rpm

Displacement: 72.2cc

Guide Bar Size: 20"(50cm)/24"(60cm)



TM-CS450



Rated Output Power: 2.4kw/9000rpm

Displacement: 50cc

Guide Bar Size: 20"(50cm)



TM-CS365




Rated Output Power: 3.4kw/12800rpm

Displacement: 65cc

Guide Bar Size: 22"(55cm)



TM-CS372



Rated Output Power: 3.9kw/12800rpm

Displacement: 72cc

Guide Bar Size: 24"(60cm)

Model No.	TM-CS2500	TM-CS2511	TM-CS3800	TM-CS4000	TM-CS4500	TM-CS5200
Cylinder bore	Ø34mm	Ø34mm	Ø39mm	Ø40mm	Ø43mm	Ø45mm
Engine Type	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled
Rated Output power	0.9kw/7500rpm	1.1kw/7500rpm	1.4kw/7500rpm	1.6kw/7500rpm	1.8kw/7500rpm	2.2kw/7500rpm
Displacement	25.4cc	25cc	38.2cc	39.6cc	45cc	52cc
Idling Speed	3200(±200)rpm	3000(±200)rpm	3300(±200)rpm	3300(±200)rpm	3300(±200)rpm	3300(±200)rpm
Guide Bar size	10"/12"	10"/12"	14"/16"	16"	16"/18"	18"/20"
Chain Pitch	3/8"	3/8"	3/8"	3/8"	0.325"	0.325"
Fuel Tank Capacity	180ml	190ml	320ml	410ml	550ml	550ml
Oil Tank Capacity	120ml	140ml	210ml	240ml	260ml	260ml
N.W.	3.0KGS	2.5KGS	4.5KGS	4.8KGS	4.8KGS	5.0KGS

Model No.	TM-CS5201	TM-CS5202	TM-CS5800	TM-CS5801	TM-CS5802	TM-CS5803
Cylinder bore	Ø45mm	Ø45mm	Ø45.2mm	Ø45.2mm	Ø45.2mm	Ø45.2mm
Engine Type	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled
Rated Output power	2.2kw/7500rpm	2.2kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm
Displacement	52cc (Option 45cc,58cc,62cc)	52cc (Option 45cc,58cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)
Idling Speed	3300(±200)rpm	3300(±200)rpm	3300(±200)rpm	3300(±200)rpm	3300(±200)rpm	3300(±200)rpm
Guide Bar size	18"/20"	18"/20"	18"/20"	18"/20"	18"/20"	18"/20"
Chain Pitch	0.325"	0.325"	0.325"	0.325"	0.325"	0.325"
Fuel Tank Capacity	550ml	550ml	550ml	550ml	550ml	550ml
Oil Tank Capacity	260ml	260ml	260ml	260ml	260ml	260ml
N.W.	5.0KGS	5.0KGS	5.0KGS	5.0KGS	5.0KGS	5.0KGS

Model No.	TM-CS5804	TM-CS5805	TM-CS5806	TM-CS5807	TM-CS5808	TM-CS5809
Cylinder bore	Ø45.2mm	Ø45.2mm	Ø45.2mm	Ø45.2mm	Ø45.2mm	Ø45.2mm
Engine Type	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled
Rated Output power	2.4kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm
Displacement	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)
Idling Speed	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm
Guide Bar size	20"/22"	20"/22"	20"/22"	20"/22"	20"/22"	20"/22"
Chain Pitch	0.325"	0.325"	0.325"	0.325"	0.325"	0.325"
Fuel Tank Capacity	550ml	550ml	550ml	550ml	550ml	550ml
Oil Tank Capacity	260ml	260ml	260ml	260ml	260ml	260ml
N.W.	5.0KGS	5.0KGS	5.0KGS	5.0KGS	5.0KGS	5.0KGS

Model No.	TM-CS5810	TM-CS5811	TM-CS5812	TM-CS5813	TM-CS5814	TM-CS5815
Cylinder bore	Ø45.2mm	Ø45.2mm	Ø45.2mm	Ø45.2mm	Ø45.2mm	Ø45.2mm
Engine Type	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled
Rated Output power	2.4kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm
Displacement	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)
Idling Speed	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm
Guide Bar size	20"/22"	20"/22"	20"/22"	20"/22"	20"/22"	20"/22"
Chain Pitch	0.325"	0.325"	0.325"	0.325"	0.325"	0.325"
Fuel Tank Capacity	550ml	550ml	550ml	550ml	550ml	550ml
Oil Tank Capacity	260ml	260ml	260ml	260ml	260ml	260ml
Net Weight	5.0KGS	5.0KGS	5.0KGS	5.0KGS	5.0KGS	5.0KGS

Model No.	TM-MS180	TM-MS250	TM-MS381	TM-CS450	TM-CS365	TM-CS372
Cylinder bore	Ø38mm	Ø40mm	Ø52mm	Ø42mm	Ø48mm	Ø50mm
Engine Type	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled
Rated Output power	1.5kw/9000rpm	2.3kw/8500rpm	3.3kw/7000rpm	2.4kw/9000rpm	3.4kw/12800rpm	3.9kw/12800rpm
Displacement	31.8cc	45.8cc	72.2cc	50cc	65cc	72cc
Idling Speed	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm
Guide Bar size	14"/16"	16"/18"	20"/24"	20"(50cm)	22"(55cm)	24"(60cm)
Chain Pitch	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Fuel Tank Capacity	250 ml	470 ml	680 ml	450 ml	770 ml	770 ml
Oil Tank Capacity	145 ml	200 ml	360 ml	260 ml	420 ml	400 ml
Net Weight	4.3KGS	4.8KGS	9.0KGS	5.2KGS	6.4KGS	6.5KGS





16"/17"Lawn mower



TM400P 16" Hand push

TM410P 17" Hand push
TM410S 17" Self-propelled



	16"(400mm)	17"(410mm)	17"(410mm)
Model No.	TM400P	TM410P	TM410S
Drive type	Hand push	Hand push	Self-propelled
Engine Model	TM130V	TM130V	TM130V
Engine Type	4-stroke, OHV	4-stroke, OHV	4-stroke, OHV
Displacement	130cc	130cc	130cc
Engine Power	2.2kw/3.0hp	2.2kw/3.0hp	2.2kw/3.0hp
Fuel tank capacity	1.0L	1.0L	1.0L
Oil Tank capacity	0.5L	0.5L	0.5L
Cutting width	400mm(16")	410mm(17")	410mm(17")
Cutting height	30-65mm /3 positions	30-75mm/5 positions	30-75mm/5 positions
Grass bag capacity	35L(Fabric)	35L(Fabric)	35L(Fabric)
Deck material	Plastic	Metal	Metal
Wheel Diameter	Front 6inch,Rear 6inch	Front 6inch,Rear 8inch	Front 7inch,Rear 8inch
Discharge	Rear	Rear	Rear

18"Lawn mower



TM460P 18" Hand push



TM460s 18" self-propelled



		18"(460mm)	18"(460mm)
Model No.		TM460P	TM460S
	Drive type	Hand push	Self-propelled
	Engine Model	TM150V	TM150V
	Engine Type	4-stroke, OHV	4-stroke, OHV
	Displacement	148cc	148cc
	Engine Power	2.8kw/4.0hp	2.8kw/4.0hp
	Fuel tank capacity	1.0L	1.0L
	Oil Tank capacity	0.5L	0.5L
	Cutting width	460mm(18")	460mm(18")
	Cutting height	30-75mm/7 positions	30-75mm/7 positions
	Grass bag capacity	50L(Fabric)	50L(Fabric)
	Deck material	Metal	Metal
	Wheel Diameter	Front 7inch,Rear 8inch	Front 7inch,Rear 8inch
	Discharge	Rear	4in1 with mulching

20" Lawn Mower



TM510P 20" Hand push



TM510S 20" Self-propelled



	20"(510mm)	20"(510mm)
Model No.	TM510P	TM510S
Drive type	Hand push	Self-propelled
Engine Model	TM175V	TM175V
Engine Type	4-stroke, OHV	4-stroke, OHV
Displacement	175cc	175cc
Engine Power	3.6kw/5.0hp	3.6kw/5.0hp
Fuel tank capacity	1.0L	1.0L
Oil Tank capacity	0.5L	0.5L
Cutting width	510mm(20")	510mm(20")
Cutting height	30-75mm/7 positions	30-75mm/7 positions
Grass bag capacity	55L(Half plastic)	55L(Half plastic)
Deck material	Metal	Metal
Wheel Diameter	Front 8inch,Rear 10inch	Front 8inch,Rear 10inch
Discharge	4in1 with mulching	4in1 with mulching



TM-EA520A



TM-EA520B




TM-EA520C

ENGINE Model	Engine Type	Displacement	Rated Power	Mixed Fuel Ratio	Optional Drill Length	Optional Bit Diameter
1E44F-5	2-stroke, Air-cooled	52CC	1.8kw(2.5hp)	1:30	80/100/120/140cm	10-30cm

Shaft extension

single blade bit

Double blade bit

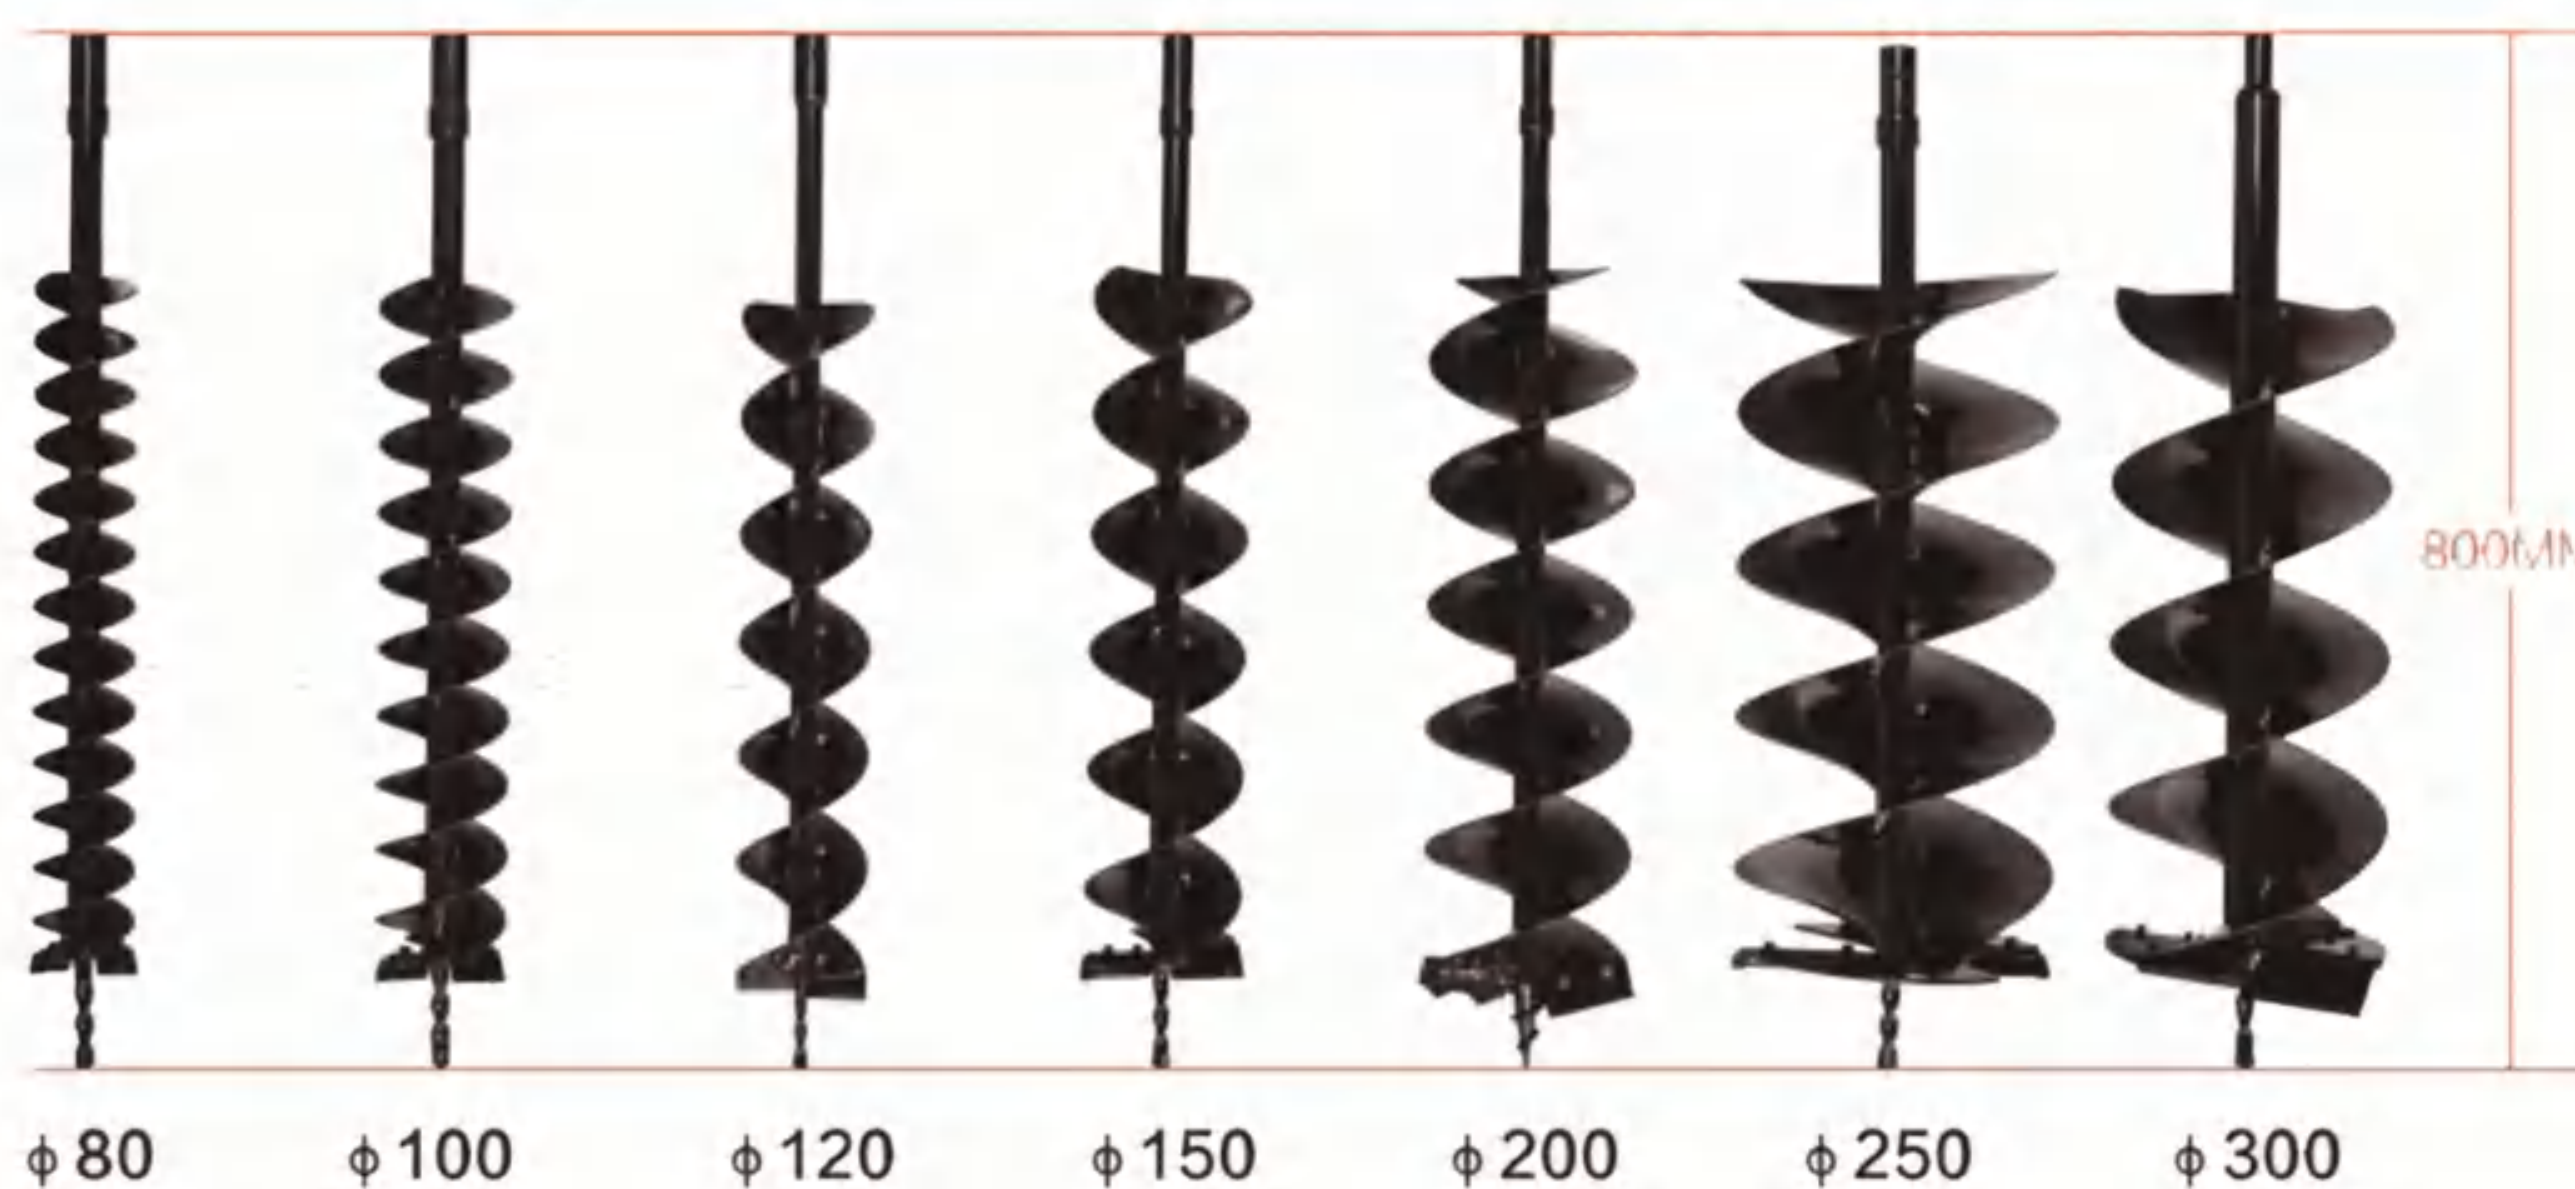

ice auger bit


TM-EA630A

TM-EA630B

TM-EA630C

ENGINE Model	Engine Type	Displacement	Rated Power	Mixed Fuel Ratio	Optional Drill Length	Optional Bit Diameter
1E48F	2-stroke,Air-cooled	63 CC	2.5kw(3.0hp)	1:30	80/100/120/140cm	10-30cm

TM-EA710


M'odel No.	TM-EA710
ENGINE Model	1E50F
Engine Type:	2-Stroke,Air cooled
Displacement:	71cc
Rated Power:	2.8kw(3.5HP)
Mixed Fuel Ratio:	1:30
Optional Drill Length:	80/100/120/140cm
Optional Bit Diameter:	10-30cm



TM-170F-1



TM-170F-2



TM-170F-3



TM-170F-4

Model No.	TM-170F-1	TM-170F-2	TM-170F-3	TM-170F-4
Engine type	Air-cooled 4 stroke OHV single cylinder			
Max.power output	7.0HP/3600rpm	7.0HP/3600rpm	7.0HP/3600rpm	7.5HP/3600rpm
Displacement	212cc	212cc	212cc	225cc
Max.Torque	12.5Nm	12.5Nm	12.5Nm	12.5Nm
Starting system	Recoil	Recoil	Recoil	Recoil
Fuel tank capacity	3.6L	3.6L	3.6L	3.6L
Oil capacity	0.6L	0.6L	0.6L	0.6L
N.W	17.0kgs	17.0kgs	17.0kgs	17.3kgs


TM-WP25A/WP40A

TM-WP25B/WP40B

Model No.	TM-WP25A	TM-WP40A	TM-WP25B	TM-WP40B
Engine type	Single cylinder 2-stroke Air cooled			
Max.power output	1.4kw/6500rpm	1.4kw/6500rpm	1.45kw/6500rpm	1.45kw/6500rpm
Displacement	42.7cc	42.7cc	40.2cc	40.2cc
Water outlet size	25mm(1")	40mm(1.5")	25mm(1")	40mm(1.5")
Starting system	Recoil	Recoil	Recoil	Recoil
Max Lift Height	30m	30m	30m	30m
Suction	8m	8m	8m	8m
N.W	6.5kgs	6.5kgs	6.5kgs	6.5kgs


TM-WP25C/WP40C

TM-WP40D(2in1)

	TM-WP25C	TM-WP40C	TM-WP40D(2in1)
Engine type	4-Stroke(GX35)	4-Stroke(GX35)	Single cylinder 2-stroke Air cooled
Max.power output	1.1kw/6500rpm	1.1kw/6500rpm	1.4kw/6500rpm
Displacement	35.8cc	35.8cc	42.7cc
Water outlet size	25mm(1")	40mm(1.5")	25mm(1") & 40mm(1.5")
Starting system	Recoil	Recoil	Recoil
Max Lift Height	30m	30m	30m
Suction	8m	8m	8m
N.W	6.5kgs	6.5kgs	6.5kgs



2"3"4"Water Pump



2"(High-pressure)

Model No.	TM-WP50A	TM-WP80A	TM-WP100A	TM-WP50B(High-pressure)
Water outlet size	50mm(2")	80mm(3")	100mm(4")	50mm(2")
Flow	30 (m ³ /h)	59 (m ³ /h)	78 (m ³ /h)	29 (m ³ /h)
Lift total	27m	26m	22m	60m
Max.suction	7m	7m	7m	7 m
Engine model	TM-170F	TM-170F	TM-170F	TM-170F
Max.power output	7.0HP/3600rpm	7.0HP/3600rpm	7.0HP/3600rpm	7.0HP/3600rpm
Displacement	212cc	212cc	212cc	212cc
Fuel tank capacity	3.6L	3.6L	3.6L	3.6L
Oil capacity	0.6L	0.6L	0.6L	0.6L



TM-WP520F



TM-WP435F

Model No.	Water outlet size	Engine type	Engine displacement	Engine power	Max Lift	Sction
TM-WP520F	1.5inch	2-Stroke Air-cooled	52cc	1.8kw/6500rpm	35m	7m
TM-WP435F	1.5inch	4-Stroke Air-cooled	35.8cc	1.1kw/6500rpm	35m	7m


TM-HT230

Model No.	TM-HT230
Engine model	1E32F
Engine type	2-Stroke,air-cooled
Displacement	22.5cc
Rated power	0.75kw/7500rpm
Cutting length	600mm
N.W	5.8kgs


TM-HT230A

Model No.	TM-HT230A
Engine model	1E32FB
Engine type	2-Stroke,air-cooled
Displacement	22.5cc
Rated power	0.75kw/7500rpm
Cutting length	600mm
N.W	5.8kgs


TM-HT230B

Model No.	TM-HT230B
Engine model	1E32F
Engine type	2-Stroke,air-cooled
Displacement	22.5cc
Rated power	0.75kw/7500rpm
Cutting length	600mm
N.W	6.5kgs


TM-TP260

Model No.	TM-TP260
Engine model	1E34F
Engine type	2-Stroke,air-cooled
Displacement	25.4cc
Rated power	0.75kw/7500rpm
Cutting length	600mm
N.W	11.5kgs

MINI TILLER



Model No.	TM-WG520A	TM-WG520B
Engine model	1E44F-5	1E44F-5
Engine type	2-Stroke,air-cooled	2-Stroke,air-cooled
Displacement	52cc	52cc
Rated power	1.8kw/6500rpm	1.8kw/6500rpm
Working width	30cm	30cm
Working depth	10-15cm	10-15cm



Model No.	TM-WG630	TM-WG144F
Engine model	1E48F	144F
Engine type	2-Stroke,air-cooled	4-Stroke, Air Cooled
Displacement	63cc	58cc
Rated power	2.4kw/6500rpm	2.2kw/6500rpm
Working width	35cm	35cm
Working depth	15-20cm	15-20cm


TM-EB260

TM-EBV260A
TM-EB260A

Model No.	TM-EB260	TM-EB260A	TM-EBV260A
Engine type	2-Stroke,air-cooled	2-Stroke,air-cooled	2-Stroke,air-cooled
Displacement	25.4cc	25.4cc	25.4cc
Rated power	0.75kw/7500rpm	0.75kw/7500rpm	0.75kw/7500rpm
Air volume	$\geq 0.2\text{m}^3/\text{s}$	$\geq 0.2\text{m}^3/\text{s}$	$\geq 0.2\text{m}^3/\text{s}$
Air speed	$\geq 70\text{m}^3/\text{s}$	$\geq 70\text{m}^3/\text{s}$	$\geq 70\text{m}^3/\text{s}$


TM-EBV260B
TM-EB260B

TM-EB430

Model No.	TM-EB260B	TM-EBV260B	TM-EB430
Engine type	2-Stroke,air-cooled	2-Stroke,air-cooled	2-Stroke,air-cooled
Displacement	25.4cc	25.4cc	42.7cc
Rated power	0.75kw/7500rpm	0.75kw/7500rpm	1.4kw/6500rpm
Air volume	$\geq 0.2\text{m}^3/\text{s}$	$\geq 0.2\text{m}^3/\text{s}$	$\geq 0.3\text{m}^3/\text{s}$
Air speed	$\geq 70\text{m}^3/\text{s}$	$\geq 70\text{m}^3/\text{s}$	$\geq 60\text{m}^3/\text{s}$


TM-EB500

TM-EB975

Model No.	TM-EB500	TM-EB975
Engine type	2-Stroke,air-cooled	2-Stroke,air-cooled
Displacement	52cc	75.6cc
Rated power	1.8kw/6500rpm	3.1kw/6500rpm
Air volume	≥0.3m³/s	≥0.4m³/s
Air speed	≥70m³/s	≥90m³/s


TM-EB9900

TM-EB985

Model No.	TM-EB9900	TM-EB985
Engine type	4-Stroke,air-cooled	2-Stroke,air-cooled
Displacement	75.6cc	75.6cc
Rated power	2.2kw/6500rpm	3.1kw/6500rpm
Air volume	≥0.4m³/s	≥0.4m³/s
Air speed	≥70m/s	≥90m³/s


TM-OE520

TM-OE630

Model No.	TM-OE520	TM-OE630
Engine model	1E44F	1E48F
Engine type	2-Stroke air-cooled	2-Stroke air-cooled
Rated power	1.8kw/6500rpm	2.4kw/6500rpm
Displacement	52cc	63cc
Transom height	400mm	400mm
Propeller Range	3-7inch	3-7inch
N.W/G.W	10/11kgs	11/12kgs


TM-OE144F

TM-OE170F

Model No.	TM-OE144F	TM-OE170F
Engine model	144F	LC1P70F
Engine type	4-Stroke air-cooled	4-Stroke air-cooled
Rated power	1.5kw/6500rpm	4.0kw/6500rpm
Displacement	53.2cc	196cc
Transom height	400mm	400mm
Propeller Range	3-7inch	3-7inch
N.W/G.W	12.5/13.5kgs	30/32kgs

TM-EBC6202



Model No.	TM-EBC6202
Rated Power	1600-2000W
Voltage	110/220V
Frequency	50/60Hz
No-load Speed	9000rpm
Max Cutting Width	420mm
Shaft	26mm
N.W./G.W	6.0/7.0kgs

TM-EBC6203



Model No.	TM-EBC6203
Rated Power	1600-2000W
Voltage	110/220V
Frequency	50/60Hz
No-load Speed	9000rpm
Max Cutting Width	420mm
Shaft	26mm
N.W./G.W	6.0/7.0kgs

TM-EBC6204



Model No.	TM-EBC6204
Rated Power	1600-2000W
Voltage	110/220V
Frequency	50/60Hz
No-load Speed	9000rpm
Max Cutting Width	420mm
Shaft	26mm
N.W./G.W	6.0/7.0kgs

TM-EBC6205



Model No.	TM-EBC6205
Rated Power	1600-2000W
Voltage	110/220V
Frequency	50/60Hz
No-load Speed	9000rpm
Max Cutting Width	420mm
Shaft	26mm
N.W./G.W	6.0/7.0kgs


TM-ECS405A

TM-ECS5018

Model No.	TM-ECS405A	TM-ECS5018
Voltage	110/220V	110/220V
Frequency	50/60Hz	50/60Hz
Rated Power	1600W	1800W
Cutting capacity	16"(40cm)	16"(40cm)
Chain Pitch	3/8"	3/8"
Automatic oil Lubrication	Yes	Yes
Tool free chain adjustment	Yes	Yes


TM-ECS8011
TM-ECS6011

TM-ECS6023


Model No.	TM-ECS6011	TM-ECS6023	TM-ECS8011
Voltage	110/220V	110/220V	110/220V
Frequency	50/60Hz	50/60Hz	50/60Hz
Rated Power	2000W	2000W	2400W
Cutting capacity	16"(40cm)	16"(40cm)	18"(45cm)/20"(50cm)
Chain Pitch	3/8"	3/8"	3/8"
Automatic oil Lubrication	Yes	Yes	Yes
Tool free chain adjustment	Yes	Yes	Yes

1E40F-5/1E44F-5

Type	Single cylinder/air cooled/two stroke
Standard power	1.47KW/1.8KW/7000RPM
Displacement	42.7CC/52CC
Carburator type	Diaphragm
Idle speed	2800-3200r/min
Tank capacity	1.2L
Diameter of pipe	28mm
weight(N.W/G.W)	8.5kg/11KG



01 Crankcase



02 Crankcase Side Cover



03 Crankshaft



04 Cylinder



05 Piston Set



06 Oil Seal



07 Muffler



08 Clutch



09 Clutch Drum



10 Spark Plug



11 Fly Wheel



12 Ignition coil



13 Carburetor



14 Starter Complete



15 Starter Pulley



16 Starter Rotator



17 Air Filter



18 Fuel Tank Support



19 Fuel Tank



20 Fuel Filter



21 Fuel Tank Cap



22 Intake Valve



23 Bearing



24 Engine Gasket set



25



26 Starter-1



27 Starter-2



28 Starter-3



29 Starter-4



30 Fuel Filter assy

GX25/GX35


Type	Single cylinder/air cooled/four stroke
Standard power	1.0KW/7000RPM
Displacement	35.8CC
Carburator type	Diaphragm
Idle speed	2800~3200r/min
Tank capacity	1.2L
Diameter of pipe	26mm
weight (N.W/G.W)	7.5kg/10KG



01 Cylinder Kit



02 Piston set

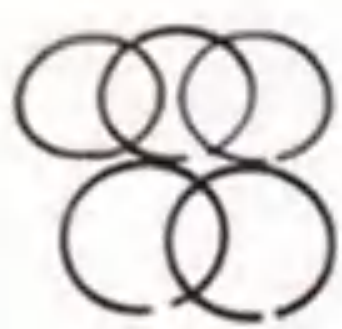


03 Piston Ring



04 Crankshaft



05 Bearing(2pcs/set)

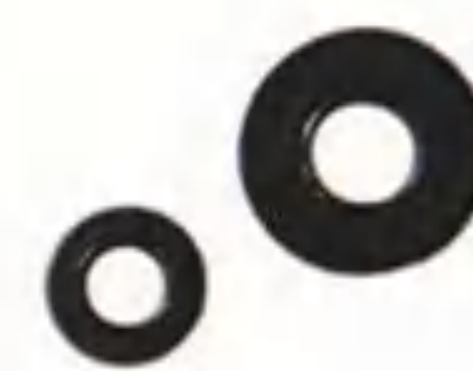

06 Oil Seal



07 Needle Cage(Piston)



08 Needle Cage(Crankshaft)



09 Muffler



10 Ignition Coil



11 Fly Wheel



12 Spark Plug



13 Starter-1



14 Starter-2



15 Starter Rewind Spring



16 Tank Housing



17 Fuel Filter assy



18 Ail Filter



19 Shroud(Engine)



20 Carburetor



21 Carburetor Repair Kit



22 Manifold



23 Clutch



24 Gasket Set



25



26 Carburetor-2



27



28



29



30

**01** Engine Cover**02** Starter Complete**03** Rear Handle**04** Handle**05** Flywheel Cover**06** Air Filter Cover**07** Brake Complete**08** Fly Wheel**09** Ignition coil**10** Air Filter**11** Tank Cap**12** Carburetor**13** Clutch**14** Muffler**15** Hose**16** Trigger interlock**17** Cylinder**18** Piston set**19** Crank shaft**20** The handle**21** Intake valve**22** Oil pump**23****24** Hose**25** Bearing**26** Needle cage**27** Needle bearing**28** Tank Cap**29****30** High tension lead**31** Rim 325**32** Sprocket**33** Choke rod**34****35** Air Filter**36**



37 Annular Buffer



38 Worm



39 Intake Valve



40



41 Starter Spring



42 Brake Band



43 Starter Pulley



43 Starter Pulley



44 Start grip



45



46 Chain Adjuster



47 Gasket Set



48 Brake Spring



49



50



51



52



53



54 Brake Spring



55 Cover plate



56



57



58



59



60



61 Spring



62 Torsion spring




63



64 Chain catcher



65

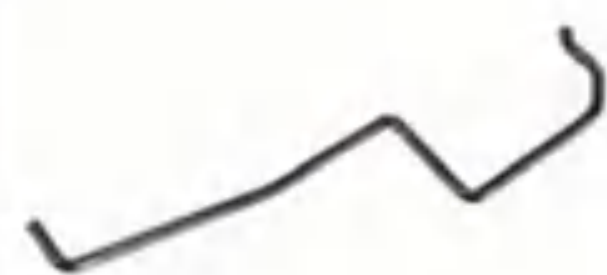

66 Throtter rod



67



68 Oil Seal



69 Gasket Set



70 Oil Seal




71



72



73

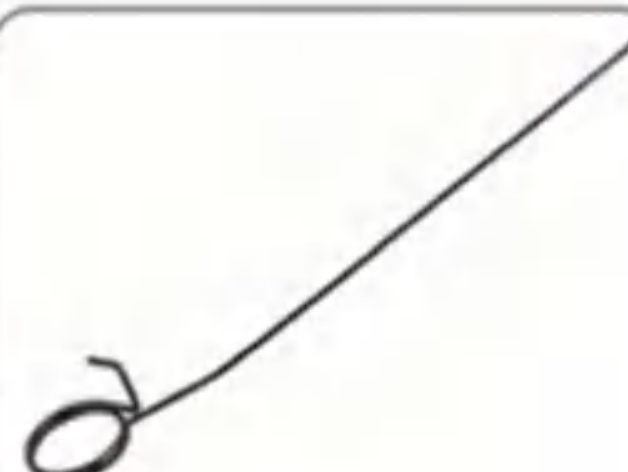

74 Spring



75



76 Woodruff key



77 Hex nut

CHAIN SAW SPARE PARTS


					
78 Hex nut	79 Screw	80 Connector	81 Springs screw	82 Self-tapping screw	83 Socket head
					
84 Adjusting screw	85	86	87	88 Oil Seal	89 Oil Seal
					
90 Fan wheel	91 Washer	92 E-clip	93	94 Manifold	95 Gasket Set
					
96 Gasket	97	98	99 Gasket Set	100 Gasket Set	101 Brake Complete
					
102 45-Cylinder	103 52-Cylinder	104 58-Cylinder	105 Starter Complete	106 Easy Starter	107 Starter Complete
					
108 Starter Pulley	109 Starter Pulley	110 Chain Sprocket	111 Air Filter	112 Air Filter	113 Air Filter
					
114 Starter Spring	115 Starter Spring	116 Crank shaft	117 Rim 3/8	118	119 Chain Adjuster



Pole saw



Pole hedge trimmer

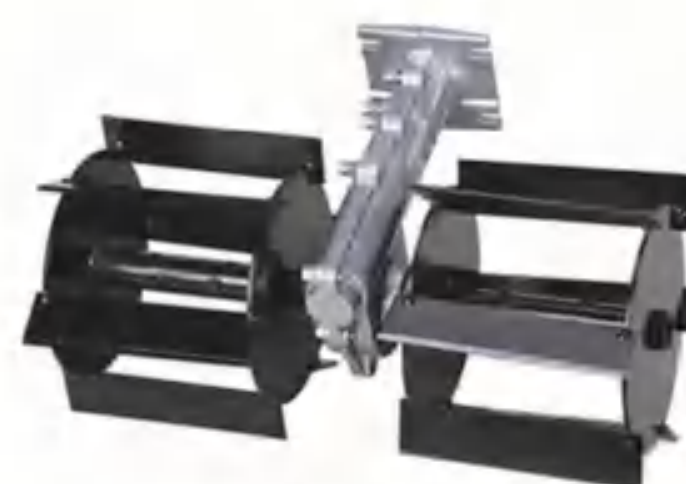

Weeder-1



Weeder-2



Tiller-1



Tiller-2



Tiller-3



water pump



Rice harvester



Blower

FACE SHIELD



1015



1016



1017



1018



1019



1020

SAFTY GOGGLES



1021



1022



1023



1024



1025



1026

KNEELET



1027



1028



1029



1030



1031



1032

BRUSH CUTTER BLADE



40T ALLOY-1



40T ALLOY-2



40T ALLOY-3



40T-ALLOY-4



40T-ALLOY-5



80T ALLOY-1



80T ALLOY-2



80T ALLOY-3



80T ALLOY-4



255X3T



255X3T-2



255X4T



255X8T



255X40T



255X60T



255X80T



305X2T(Alloy)



305X2T(Diamond)



305X2T

NEW DESIGN BLADE



CIRCULAR SAW BLADE



NEW DESIGN 6T



PLASTIC BLADE



SAWCHAIN BLADE



STEEL WIRE TRIMMER HEAD



WEED BLADE

TRIMMER HEAD



1301



1302



1303



1304



1305



1306



1307



1308



1309



1310



1311




1312




1313



1314

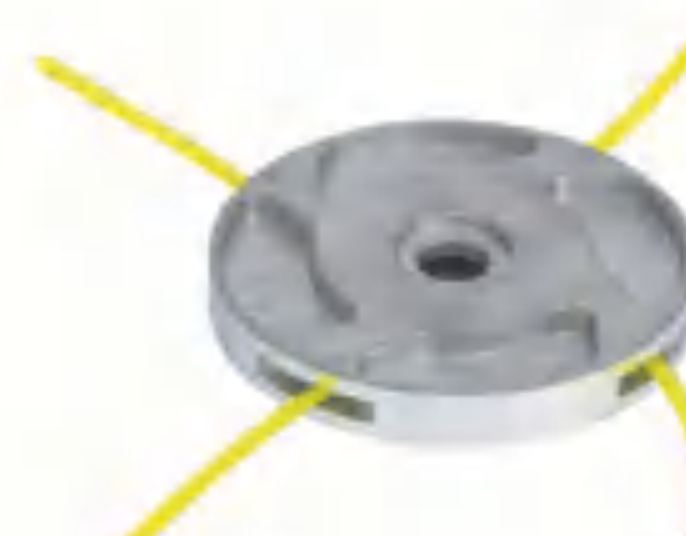

1315

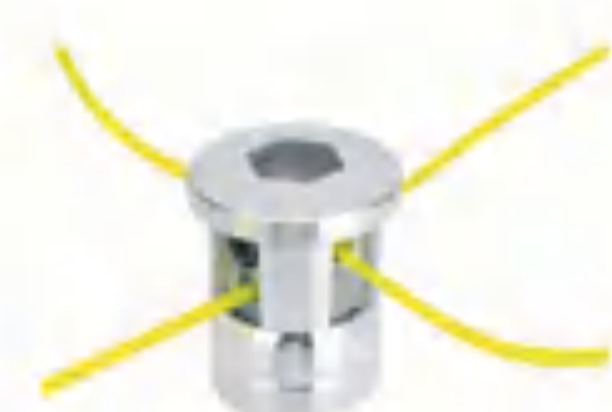

1316



1317



1318



1319



1320



1321

TRIMMER LINE



1401



1402



1403



1404



1405



1406



1407

SHOULDER BRUSH CUTTER CONTROL BOX



1101



1102



1103



1104



1105



1106



1107



1108



1109



1110



1111



1112



1113



1114



1115



1116

BACKPACK BRUSH CUTTER CONTROL BOX



1117



1118



1119



1120



1121

BRUSH CUTTER HARNESS



1122



1123



1124



1125



1126

BRUSH CUTTER CONNECTOR AND SHAFT ASSY



1538



1538



1539



1540



1541



1542



1543



1544



1545



1546



1547



1548



1549



1550

BRUSH CUTTER SHAFT ASSY



(4T/7T/9T/10T/11T)



A



B



C



D




E



F



G

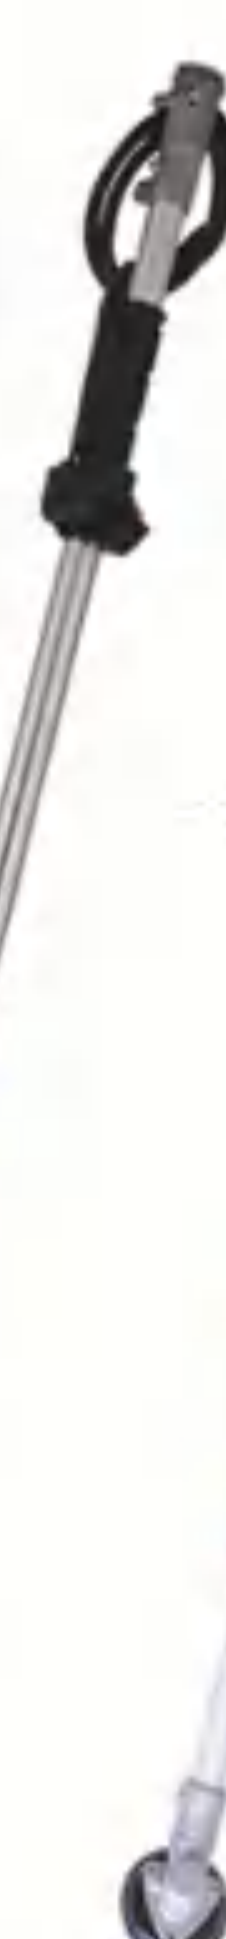

H



I



J

CORDLESS BRUSH CUTTER

TM-BC312Li

NEW

**BRUSHLESS
MOTOR**

20V + 20V



Li-ion Battery:	20V + 20V DC
Motor Type:	Brushless
Rated Power:	1000W
No-load Speed:	16000rpm
Max Cutting Width:	305mm
Working shaft:	150cm

D handle or Bicycle handle

Accessories



4.0AH



CORDLESS MOWER

TM-LM313Li

NEW

**BRUSHLESS
MOTOR**

20V



Li-ion Battery:	20V DC
Motor Type:	Brushless
Rated Power:	500W
Max Cutting Width:	210mm
Working shaft:	150cm

Accessories



4.0AH



CORDLESS BRUSH CUTTER TM-GT301Li

12V



Description

- * Li-ion Battery: 12V DC
- * Motor Type: Brushed(Front)
- * Rated Power: 450W
- * No-load Speed: 10000rpm
- * Max Cutting Width: 150mm
- * Telescope range: 90-130cm

Accessories



CORDLESS BRUSH CUTTER TM-GT302Li

20V



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushed(Front)
- * Rated Power: 650W
- * No-load Speed: 10000rpm
- * Max Cutting Width: 150mm
- * Telescope range: 90-130cm

Accessories



CORDLESS BRUSH CUTTER TM-GT303Li

BRUSHLESS MOTOR

20V



Description

- * Li-ion Battery: 20V DC
- * Motor type: Brushless (Front)
- * Rated Power 800w
- * No-load speed 10000rpm
- * Max Cutting Width: 200mm
- * Telescope range: 100-140cm

Accessories



CORDLESS BRUSH CUTTER TM-GT304Li

BRUSHLESS MOTOR

20V



Description

- * Li-ion Battery: 20V DC
- * Motor type: Brushless (Front)
- * Rated Power 800w
- * No-load speed 10000rpm
- * Max Cutting Width: 200mm
- * Telescope range: 100-140cm
- * With LCD display

Accessories



CORDLESS BRUSH CUTTER TM-GT307Li

BRUSHLESS MOTOR

20V



Description

- * Li-ion Battery: 20V DC
- * Motor type: Brushless (Front)
- * Rated Power : 700w
- * No-load speed : 9000rpm
- * Max Cutting Width: 200mm
- * Telescope: 120-150cm
- * With LCD display
- * With adjustable handle

Accessories



CORDLESS BRUSH CUTTER TM-GT306Li

BRUSHLESS MOTOR

20V



Description

- * Li-ion Battery: 20V DC
- * Motor type: Brushless (Rear)
- * Rated Power : 1000w
- * No-load speed : 8000rpm
- * Max Cutting Width: 230mm
- * Working shaft: 150cm (Split shaft)

Accessories



CORDLESS BRUSH CUTTER TM-GT306BLi

BRUSHLESS
MOTOR

20V + 20V



Description

- * Li-ion Battery: 20V+20V DC
- * Motor type: Brushless (Rear)
- * Rated Power : 1000w
- * No-load speed : 8000rpm
- * Max Cutting Width: 230mm
- * Working shaft: 150cm (Split shaft)

Accessories



4.0AH



9"

CORDLESS BRUSH CUTTER TM-GT308Li

BRUSHLESS
MOTOR

20V



Description

- * Li-ion Battery: 20V
- * Motor type: Brushless (Front)
- * Rated Power : 1200w
- * No-load speed : 8000rpm
- * Max Cutting Width: 255mm
- * Telescope: 120-150cm

Accessories



4.0AH



10"

10"

CORDLESS BRUSH CUTTER TM-GT309ALi



BRUSHLESS
MOTOR

20V

Description

- * Li-ion Battery: 20V DC
- * Motor type: Brushless (Rear)
- * Rated Power : 1000w
- * No-load speed : 8000rpm
- * Max Cutting Width: 230mm
- * Working shaft: 26mm
- * With LCD display
- * D handle or Bicycle handle

Accessories



4.0AH



9"

CORDLESS BRUSH CUTTER TM-GT309BLi



BRUSHLESS
MOTOR

40V

Description

- * Li-ion Battery: 40V DC
- * Motor type: Brushless (Rear)
- * Rated Power : 1000w
- * No-load speed : 8000rpm
- * Max Cutting Width: 230mm
- * Working shaft: 26mm
- * With LCD display
- * D handle or Bicycle handle

Accessories



6.0AH



10"

CORDLESS BRUSH CUTTER TM-GT310ALi



Description

- * Li-ion Battery: 20V DC
- * Motor type: Brushless (Rear)
- * Rated Power : 1000w
- * No-load speed : 8000rpm
- * Max Cutting Width: 230mm
- * Working shaft: 26mm
- * With LCD display
- * D handle or Bicycle handle

Accessories



4.0AH



10"

CORDLESS BRUSH CUTTER TM-GT310BLi



Description

- Li-ion Battery: 40V DC
- Motor type: Brushless (Rear)
- Rated Power : 1000w
- No-load speed : 8000rpm
- Max Cutting Width: 230mm
- Working shaft: 26mm
- With LCD display
- D handle or Bicycle handle

Accessories



6.0AH



CORDLESS BRUSH CUTTER TM-MT309Li



Description

- * Li-ion Battery: 20V DC
- * Motor type: Brushless (Rear)
- * Rated Power : 1000w
- * No-load speed : 8000rpm
- * Max Cutting Width: 230mm
- * Working shaft: 26mm
- * With LCD display
- * D handle or Bicycle handle

Accessories



3.0AH



9"

CORDLESS CHAIN SAW

TM-CS400Li



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushed
- * Rated Power: 550W
- * Operation : one-hand
- * No-load Speed: 12000rpm
- * Cutting Length: 10cm(4")-15cm(6")
- * Chain Speed: 5m/s
- * Chain Pitch: 1/4"
- * Chain lubricating: Without

Accessories



CORDLESS CHAIN SAW

TM-CS401ALi



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushed
- * Rated Power: 550W
- * Operation : one-hand
- * No-load Speed: 12000rpm
- * Cutting Length: 10cm(4")-15cm(6")
- * Chain Speed: 5m/s
- * Chain Pitch: 1/4"
- * Chain lubricating: Without

Accessories



CORDLESS CHAIN SAW

TM-CS401BLi



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushed
- * Rated Power: 550W
- * Operation : one-hand
- * No-load Speed: 12000rpm
- * Cutting Length: 10cm(4")-15cm(6")
- * Chain Speed: 5m/s
- * Chain Pitch: 1/4"
- * Chain lubricating: Without

Accessories



CORDLESS CHAIN SAW

TM-CS401ELi



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushed
- * Rated Power: 550W
- * Operation : one-hand
- * No-load Speed: 12000rpm
- * Cutting Length: 10cm(4")-15cm(6")
- * Chain Speed: 5m/s
- * Chain Pitch: 1/4"
- * Chain lubricating: Manual Type

Accessories



CORDLESS CHAIN SAW

TM-CS401CLi



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushed
- * Rated Power: 550W
- * Operation : one-hand
- * No-load Speed: 12000rpm
- * Cutting Length: 10cm(4")-15cm(6")
- * Chain Speed: 5m/s
- * Chain Pitch: 1/4"
- * Chain lubricating: Manual Type

Accessories



CORDLESS CHAIN SAW

TM-CS401DLi



Description

- * Li-ion Battery: 16V DC
- * Motor Type: Brushed
- * Rated Power: 550W
- * Operation : one-hand
- * No-load Speed: 12000rpm
- * Cutting Length: 10cm(4")-15cm(6")
- * Chain Speed: 5m/s
- * Chain Pitch: 1/4"
- * Chain lubricating: Manual Type

Accessories



CORDLESS CHAIN SAW

TM-CS402Li



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 600W
- * Operation : one-hand
- * No-load Speed: 12000rpm
- * Cutting Length: 15cm(6")
- * Chain Speed: 10m/s
- * Chain Pitch: 1/4"
- * With Oil Bubble
- * Chain lubricating: Manual Type

Accessories



CORDLESS CHAIN SAW

TM-CS412BLi



Description

- * Li-ion Battery: 16V DC
- * Motor Type: Brushless
- * Rated Power: 600W
- * Operation : one-hand
- * No-load Speed: 12000rpm
- * Cutting Length: 15cm(6")
- * Chain Speed: 10m/s
- * Chain Pitch: 1/4"
- * Chain lubricating: Manual Type

Accessories



CORDLESS CHAIN SAW

TM-CS412Li



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 800W
- * Operation : one-hand
- * No-load Speed: 12000rpm
- * Max Cutting Length: 20cm(8")
- * Chain Speed: 10m/s
- * Chain Pitch: 1/4"
- * Chain lubricating: Automatic Type
- * LCD display: Yes

Accessories



CORDLESS CHAIN SAW

TM-CS418Li



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 600W
- * Operation : one-hand
- * No-load Speed: 12000rpm
- * Cutting Length: 20cm(8")
- * Charging Time: 2-3H
- * Chain Speed: 10m/s
- * Chain Pitch: 1/4"
- * Chain lubricating: Automatic Type
- * LCD display: Yes

Accessories



CORDLESS CHAIN SAW

TM-CS428Li



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 800W
- * Operation : one-hand
- * No-load Speed: 12000rpm
- * Max Cutting Length: 20cm(8")
- * Chain Speed: 10m/s
- * Chain Pitch: 1/4"
- * Chain lubricating: Automatic Type
- * LCD display: Yes

Accessories



CORDLESS CHAIN SAW

TM-CS429Li



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 800W
- * Operation : one-hand
- * No-load Speed: 12000rpm
- * Max Cutting Length: 20cm(8")
- * Chain Speed: 10m/s
- * Chain Pitch: 1/4"
- * Chain lubricating: Automatic Type
- * LCD display: Yes

Accessories



CORDLESS CHAIN SAW

TM-CS405ALi

BRUSHLESS
MOTOR

20V



12"

Li-ion Battery:	20V DC
Motor Type:	Brushless
Rated Power:	900W
Operation :	two-hands
No-load Speed:	10000rpm
Cutting Length:	30cm(12")
Chain Speed:	15m/s
Chain Pitch:	1/4"
Chain lubricating:	Automatic Type
LCD display:	Yes

CORDLESS CHAIN SAW

TM-CS405BLi

BRUSHLESS
MOTOR

20V



12"

Li-ion Battery:	20V DC
Motor Type:	Brushless
Rated Power:	1200W
Operation :	two-hands
No-load Speed:	10000rpm
Cutting Length:	30cm(12")
Chain Speed:	10m/s
Chain Pitch:	3/8"P
Chain lubricating:	Automatic Type
LCD display:	Yes

CORDLESS CHAIN SAW

TM-CS410Li

BRUSHLESS
MOTOR

20V



12"

Li-ion Battery:	20V DC
Motor Type:	Brushless
Rated Power:	1200W
Operation :	two-hands
No-load Speed:	10000rpm
Cutting Length:	30cm(12")
Chain Speed:	10m/s
Chain Pitch:	3/8"P
Chain lubricating:	Automatic Type
LCD display:	Yes

CORDLESS CHAIN SAW

TM-CS406Li

BRUSHLESS
MOTOR

20V



10"/12"

Li-ion Battery:	20V DC
Motor Type:	Brushless
Rated Power:	1200W
Operation :	two-hands
No-load Speed:	10000rpm
Cutting Length:	25cm(10")-30cm(12")
Chain Speed:	10m/s
Chain Pitch:	3/8"P
Chain lubricating:	Automatic Type
LCD display:	No

CORDLESS CHAIN SAW

TM-CS420Li

BRUSHLESS
MOTOR

20V



12"

Li-ion Battery:	20V DC
Motor Type:	Brushless
Rated Power:	1200W
No-load Speed:	10000rpm
Cutting Length:	30cm(12")
Chain Speed:	12m/s
Chain Pitch:	1/4"
Chain lubricating:	Automatic Type
LCD display:	Yes

CORDLESS CHAIN SAW

TM-CS421Li

BRUSHLESS
MOTOR

20V



10"/12"

Li-ion Battery:	20V DC
Motor Type:	Brushless
Rated Power:	800W
Operation :	two-hands
No-load Speed:	10000rpm
Cutting Length:	25cm(10")-30cm(12")
Chain Speed:	8m/s
Chain Pitch:	3/8"P
Chain lubricating:	Manual Type
LCD display:	No

CORDLESS CHAIN SAW

TM-CS422Li

BRUSHLESS
MOTOR

20V



12"

Li-ion Battery:	20V DC
Motor Type:	Brushless
Rated Power:	1000W
Operation :	two-hands
No-load Speed:	10000rpm
Cutting Length:	30cm(12")
Chain Speed:	10m/s
Chain Pitch:	3/8"P
Chain lubricating:	Automatic Type
LCD display:	Yes

With electronic braking system

CORDLESS CHAIN SAW

TM-CS423Li

BRUSHLESS
MOTOR

20V



12"

Li-ion Battery:	20V DC
Motor Type:	Brushless
Rated Power:	1000W
Operation :	two-hands
No-load Speed:	10000rpm
Cutting Length:	30cm(12")
Chain Speed:	15m/s
Chain Pitch:	3/8"P
Chain lubricating:	Automatic Type
LCD display:	Yes

With electronic braking system

CORDLESS CHAIN SAW

TM-CS408Li

BRUSHLESS
MOTOR

20V + 20V



16"

Li-ion Battery:	20V +20V DC
Motor Type:	Brushless
Rated Power:	1800W
Operation :	two-hands
No-load Speed:	8000rpm
Cutting Length:	40cm(16")
Chain Speed:	12m/s
Chain Pitch:	3/8"P
Chain lubricating:	Automatic Type
LCD display:	Yes

With electronic braking system

CORDLESS CHAIN SAW

TM-CS416Li

BRUSHLESS
MOTOR

20V + 20V



16"

Li-ion Battery:	20V +20V DC
Motor Type:	Brushless
Rated Power:	1800W
Operation :	two-hands
No-load Speed:	8000rpm
Cutting Length:	40cm(16")
Chain Speed:	12m/s
Chain lubricating:	Automatic Type
LCD display:	Yes

With electronic braking system

CORDLESS CHAIN SAW

TM-CS415Li

BRUSHLESS
MOTOR

40V



14"

Li-ion Battery:	40V DC
Motor Type:	Brushless
Rated Power:	1600W
Operation :	two-hands
No-load Speed:	10000rpm
Cutting Length:	35cm(14")
Chain Speed:	12m/s
Chain Pitch:	3/8"P
Chain lubricating:	Automatic Type
LCD display:	Yes

With electronic braking system

CORDLESS CHAIN SAW

TM-CS425Li

BRUSHLESS
MOTOR

40V



16"

Li-ion Battery:	40V DC
Motor Type:	Brushless
Rated Power:	2000W
Operation :	two-hands
No-load Speed:	8000rpm
Cutting Length:	40cm(16")
Chain Speed:	12m/s
Chain lubricating:	Automatic Type
LCD display:	Yes

CORDLESS CHAIN SAW

TM-CS409Li

BRUSHLESS
MOTOR

40V



16"

Li-ion Battery:	40V DC
Motor Type:	Brushless
Rated Power:	2000W
Operation :	two-hands
No-load Speed:	8000rpm
Cutting Length:	40cm(16")
Chain Speed:	12m/s
Chain lubricating:	Automatic Type
LCD display:	Yes

CORDLESS CHAIN SAW

TM-CS424Li

BRUSHLESS
MOTOR

40V



16"

Li-ion Battery:	40V DC
Motor Type:	Brushless
Rated Power:	2000W
Operation :	two-hands
No-load Speed:	8000rpm
Cutting Length:	40cm(16")
Chain Speed:	12m/s
Chain lubricating:	Automatic Type
LCD display:	Yes

With electronic braking system

CORDLESS POLE CHAIN SAW

TM-CS417Li



BRUSHLESS
MOTOR

20V

8"

Li-ion Battery:	20V DC
Motor Type:	Brushless
Rated Power:	800W
No-load Speed:	12000rpm
Cutting Length:	20cm(8")
Chain Speed:	8m/s
Chain Pitch:	3/8"P
Telescopic scope:	150-300cm
Rotatable:	0-90°

CORDLESS POLE HEDGE TRIMMER

TM-CS418Li



BRUSHLESS
MOTOR

20V

Li-ion Battery:	20V DC
Motor Type:	Brushless
Rated Power:	800W
No-load Speed:	12000rpm
Cutting Length:	410mm
Telescopic scope:	1.6-2.0m

25mm CORDLESS PRUNING SCISSOR **TM-SH2501Li**

**BRUSHLESS
MOTOR**

16V



Description

- * Li-ion Battery: 16V DC
- * Motor Type: Brushless
- * Rated Power: 300W
- * Cutting Diameter: 0-25mm
- * Blade material: SK5
- * Charging Time: 2-3H
- * Working time: 4-6H
- * LCD display: No

Accessories



2.0AH

BMC CASE

25mm CORDLESS PRUNING SCISSOR **TM-SH2506Li**

**BRUSHLESS
MOTOR**

16V



Description

- * Li-ion Battery: 16V DC
- * Motor Type: Brushless
- * Rated Power: 300W
- * Cutting Diameter: 0-25mm
- * Blade material: SK5
- * Charging Time: 2-3H
- * Working time: 4-6H
- * LCD display: Yes

Accessories



2.0AH

BMC CASE

28mm CORDLESS PRUNING SCISSOR **TM-SH2502Li**

**BRUSHLESS
MOTOR**

20V



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 300W
- * Cutting Diameter: 0-28mm
- * Blade material: SK5
- * Charging Time: 2-3H
- * Working time: 4-6H
- * LCD display: No

Accessories



2.0AH

BMC CASE

28mm CORDLESS PRUNING SCISSOR **TM-SH2503Li**

**BRUSHLESS
MOTOR**

20V



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 300W
- * Cutting Diameter: 0-28mm
- * Blade material: SK5
- * Charging Time: 2-3H
- * Working time: 4-6H
- * LCD display: No

Accessories



2.0AH

BMC CASE

28mm CORDLESS PRUNING SCISSOR **TM-SH2504Li**

**BRUSHLESS
MOTOR**

20V



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 300W
- * Cutting Diameter: 0-28mm
- * Blade material: SK5
- * Charging Time: 2-3H
- * Working time: 4-6H
- * LCD display: No

Accessories



2.0AH

BMC CASE

32mm CORDLESS PRUNING SCISSOR **TM-SH3501Li**

**BRUSHLESS
MOTOR**

20V



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 400W
- * Cutting Diameter: 0-32mm
- * Blade material: SK5
- * Charging Time: 2-3H
- * Working time: 4-6H
- * LCD display: Yes

Accessories



2.0AH

BMC CASE

32mm CORDLESS PRUNING SCISSOR

TM-SH3502Li



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 400W
- * Cutting Diameter: 0-32mm
- * Blade material SK5
- * Charging Time: 2-3H
- * Working time: 4-6H
- * LCD display: Yes

Accessories



1.5AH

BMC CASE

32mm CORDLESS PRUNING SCISSOR

TM-SH3504Li



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 400W
- * Cutting Diameter: 0-32mm
- * Blade material SK5
- * Charging Time: 2-3H
- * Working time: 4-6H
- * LCD display: Yes

Accessories



2.0AH

BMC CASE

40mm CORDLESS PRUNING SCISSOR

TM-SH4501Li



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 450W
- * Cutting Diameter: 0-40mm
- * Blade material SK5
- * Charging Time: 2-3H
- * Working time: 4-6H
- * LCD display: Yes

Accessories



2.0AH

BMC CASE

40mm CORDLESS PRUNING SCISSOR

TM-SH4502Li



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 450W
- * Cutting Diameter: 0-40mm
- * Blade material SK5
- * Charging Time: 2-3H
- * Working time: 4-6H
- * LCD display: Yes

Accessories



2.0AH

BMC CASE

50mm CORDLESS PRUNING SCISSOR

TM-SH5002Li



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 600W
- * Cutting Diameter: 0-50mm
- * Blade material SK5
- * LCD display: Yes

Accessories



2.0AH

BMC CASE

50mm CORDLESS PRUNING SCISSOR

TM-SH5001Li



Description

- * Li-ion Battery: 25V DC
- * Motor Type: Brushless
- * Rated Power: 600W
- * Cutting Diameter: 0-50mm
- * Blade material SK5
- * Charging Time: 2-3H
- * LCD display: Yes

Accessories



4.0AH

BMC CASE



CORDLESS SAW & SCISSOR SET
TM-3006Li



CORDLESS POLE SCISSOR AND SAW
TM-P3015Ali

**BRUSHLESS
MOTOR**

Li-ion Battery:	20V DC
Motor Type:	Brushless
Rated Power:	300W
Scissor Cutting :	28mm
Saw Cutting:	6"(15cm)
Telescopic scope:	1.5-3.0m



CORDLESS POLE SCISSOR AND SAW
TM-P3016BLi

**BRUSHLESS
MOTOR**

Li-ion Battery:	20V DC
Motor Type:	Brushless
Rated Power:	300W
Scissor Cutting :	28mm
Saw Cutting:	6"(15cm)
Telescopic scope:	1.5-3.0m

CORDLESS HEDGE TRIMMER **TM-SH704Li**



Description

- * Li-on Battery: 20V 1.5ah
- * Motor Type: Brushed
- * Rated Power: 400w
- * No-load Speed: 1350rpm
- * Max Cutting Length: 130mm (mower) 230mm(hedge trimmer)

Accessories



1.5AH

CORDLESS HEDGE TRIMMER **TM-SH705Li**



Description

- * Li-on Battery: 20V 1.5ah
- * Motor Type: Brushed
- * Rated Power: 400w
- * No-load Speed: 1350rpm
- * Max Cutting Length: 150mm (mower) 300mm(hedge trimmer)

Accessories



1.5AH

CORDLESS HEDGE TRIMMER **TM-HT602Li**



Description

- * Lithium Battery: 20V DC
- * Motor Type: Brushed
- * Rated Power: 600w
- * No-load speed: 1500rpm
- * Max Cutting Length: 510mm
- * Max Cutting Diameter: 15mm

Accessories



3.0AH

CORDLESS HEDGE TRIMMER **TM-HT601Li**



Description

- * Lithium Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 500w
- * No-load speed: 1700rpm
- * Max Cutting Length: 510mm
- * Max Cutting Diameter: 15mm

Accessories



3.0AH

CORDLESS HEDGE TRIMMER **TM-HT603Li**



Description

- * Lithium Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 600w
- * No-load speed: 1700rpm
- * Max Cutting Length: 510mm
- * Max Cutting Diameter: 15mm
- * Rear handle rotatable: 180°

Accessories



3.0AH

CORDLESS HEDGE TRIMMER **TM-HT604Li**



Description

- * Lithium Battery: 40V DC
- * Motor Type: Brushless
- * Rated Power: 1200w
- * No-load speed: 2200rpm
- * Max Cutting Length: 680mm
- * Max Cutting Diameter: 20mm

Accessories



6.0AH

CORDLESS LAWN MOWER

TM-LM320Li



Lithium Battery:	20V DC
Motor Type:	Brushless
Working Time:	10-20min(4.0AH)
No-load speed:	3000rpm
Cutting capacity:	320mm
Adjustable 3 height position:	25/45/65mm
Cutting height adjustment:	wheel adjustment
Collection box capacity:	25L plastic
Wheels:	5.5inch, rear:5.5inch

(PP wheels with cover)

CORDLESS LAWN MOWER

TM-LM340Li



Lithium Battery:	20V DC
Motor Type:	Brushless
Working Time:	10-20min(4.0AH)
No-load speed:	3000rpm
Cutting capacity:	340mm
Adjustable 3 height position:	25/45/65mm
Cutting height adjustment:	wheel adjustment
Collection box capacity:	35L plastic
Wheels:	5.5inch, rear:5.5inch

(PP wheels with cover)

CORDLESS LAWN MOWER

TM-LM380Li



Lithium Battery:	20V+20V DC
Motor Type:	Brushless
Working Time:	15-25min(4.0AH)
No-load speed:	3000rpm
Cutting capacity:	380mm
Adjustable 5 height position:	25-75mm
Cutting height adjustment:	central adjustment
Collection box capacity:	40L plastic
Wheels:	6inch, rear:8inch

(PP wheels with cover)

CORDLESS LAWN MOWER

TM-LM420Li



Lithium Battery:	20V+20V DC
Motor Type:	Brushless
Working Time:	15-25min(4.0AH)
No-load speed:	2800rpm
Cutting capacity:	420mm
Adjustable 5 height position:	25-80mm
Cutting height adjustment:	central adjustment
Collection box capacity:	48L plastic
Wheels:	7inch, rear:10inch

(PP wheels with cover)

CORDLESS MINI TILLER

TM-TL150ALi



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushed
- * Rated power: 300W
- * No-load Speed: 300rpm
- * Working Width: 15cm (single blade)
- * Working Depth: 40mm

Accessories



3.0AH

CORDLESS MINI TILLER

TM-TL150BLi

BRUSHLESS
MOTOR



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushless
- * Rated power: 450W
- * No-load Speed: 330rpm
- * Working Width: 15cm (single blade)
- * Working Depth: 40mm

Accessories



4.0AH

CORDLESS MINI TILLER

TM-TL200ALi



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushed
- * Rated power: 450W
- * No-load Speed: 330rpm
- * Working Width: 20cm (double blade)
- * Working Depth: 200mm

Accessories



4.0AH

CORDLESS MINI TILLER

TM-TL200BLi

BRUSHLESS
MOTOR



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushless
- * Rated power: 550W
- * No-load Speed: 330rpm
- * Working Width: 20cm (double blade)
- * Working Depth: 200mm

Accessories



4.0AH

CORDLESS TURBO BLOWER

TM-EB806Li



Description

- * Lithium Battery: 20V DC
- * Motor Type: Brushed
- * No-load Speed: 35000rpm
- * Max Air Speed: 100km/h
- * Max Air Volume: 2.5m³/min

Accessory&Optional



1.5AH

CORDLESS VACUUM CLEANER

TM-EB807Li



Description

- * Lithium Battery: 20V DC
- * Motor Type: Brushed
- * Rated power : 120W
- * No-load Speed: 35000rpm
- * Vacuum : 5.0kpa

Accessory&Optional



1.5AH

CORDLESS BLOWER

TM-EB801Li



Description

- * Lithium Battery: 20V DC
- * Motor Type: Brushed
- * No-load Speed: 18000rpm
- * Max Air Speed: 100km/h
- * Max Air Volume: 2.8m³/min

Accessory&Optional



1.5AH

CORDLESS BLOWER

TM-EB803Li



Description

- * Lithium Battery: 20V DC
- * Motor Type: Brushed
- * No-load Speed: 16000rpm
- * Max Air Speed: 140km/h
- * Max Air Volume: 8.4m³/min

Accessory&Optional



4.0AH

CORDLESS BLOWER

TM-EB804Li



Description

- * Lithium Battery: 20V DC
- * Motor Type: Brushed
- * No-load Speed: 16000rpm
- * Max Air Speed: 140km/h
- * Max Air Volume: 8.4m³/min

Accessory&Optional



4.0AH



**BRUSHLESS
MOTOR**



20V

CORDLESS MULTI-FUNCTION TOOLS

TM-MT200Li

Description

- * Output power :300w
- * Motor Type: Brushless
- * No-load Speed: 18000rpm



MT201

TWO SPEED DRILL ATTACHMENT

Chuck dia :10mm
Torque: 32N.m
No-load Speed: 1450rpm



MT202

SCREW DRIVER ATTACHMENT

Chuck dia :6.35mm
Torque: 180N.m
No-load Speed: 3300rpm



MT203

IMPACT WRENCH ATTACHMENT

Chuck dia :6.35mm+12.7mm
Torque: 300N.m
No-load Speed: 2800rpm



MT204

SANDER ATTACHMENT

Plate size:94*135mm
No-load Speed: 10000rpm



MT205

JIA SAW ATTACHMENT

Cutting capacity :12.7mm
No-load Speed: 2700rpm



MT206

RECIPROCATING SAW ATTACHMENT

Cutting capacity :15mm
No-load Speed: 3000rpm



MT207

CHAIN SAW ATTACHMENT

Cutting capacity :100mm
No-load Speed: 4000rpm



MT208

MOWER ATTACHMENT

Cutting capacity :80mm
No-load Speed: 1200rpm



MT209

HEDGE TRIMMER ATTACHMENT

Cutting capacity :160mm
No-load Speed: 1200rpm



MT210

WASHER ATTACHMENT

Flow :2.4L/min
Pressure:3.0Mpa



MT211

BLOWER ATTACHMENT

Air flow :2.8m³/min
No-load Speed: 24000rpm



MT212

ANGLE GRINDER ATTACHMENT

Cutting blade dia. :100mm
blade inner dia. :16mm
No-load Speed: 8000rpm



MT213

HAMMER DRILL ATTACHMENT

Impact frequency:5500bpm
Impact energy. :1.7J
No-load Speed: 2000rpm



MT214

INFLATING PUMP ATTACHMENT

Pressure:6.9Bar
No-load Speed: 3300rpm



**MT215
MT216**

PLASTIC TOOLS BOX

Dimension:3.65*28*11cm
(3.65*28*19.5cm)

CORDLESS CAR WASHER TM-CW900Li

20V



Description

- * Lithium Battery: 20V DC
- * Motor Type: Brushed
- * Rated Power: 300w
- * Pressure : 10 Bar
- * Water flow: 4L / min

Accessories



CORDLESS CAR WASHER TM-CW901Li

20V



Description

- * Lithium Battery: 20V DC
- * Motor Type: Brushed
- * Rated Power: 500w
- * Pressure : 20 Bar
- * Water flow: 5.6L / min

Accessories



CORDLESS CAR WASHER TM-CW902Li

BRUSHLESS MOTOR
20V



Description

- * Lithium Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 500w
- * Pressure : 20 Bar
- * Water flow: 5.6L / min

Accessories



CORDLESS ANGLE GRINDER TM-GD903Li

16V



Description

- * Lithium Battery: 16V DC
- * Motor Type: Brushed
- * Rated Power: 550w
- * Max Cutting thickness: 10mm

Accessories



CORDLESS ANGLE GRINDER TM-GD903BLi

BRUSHLESS MOTOR
16V



Description

- * Lithium Battery: 16V DC
- * Motor Type: Brushless
- * Rated Power: 600w
- * Max Cutting thickness: 10mm
- * With display

Accessories



CORDLESS SPRAYER TM-SP904Li

4V



Description

- * Lithium Battery: 4.0V DC
- * Motor Type: Brushed
- * Rated Power: 80w
- * Tank capacity: 5L

TEA LEAF PICKER

TM-4CD35ALi



Description

- * Lithium Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 300w
- * Blade Length: 350mm
- * Productivity: >30kg/h

Accessories



4.0AH

TEA LEAF PICKER

TM-4CD35BLi



Description

- * Lithium Battery: 24V DC
- * Motor Type: Brushless
- * Rated Power: 300w
- * Blade Length: 350mm
- * Productivity: >30kg/h

Accessories



12AH

CORDLESS EARTH AUGER

TM-EA904Li



Description

- * Lithium Battery: 20V+20V DC
- * Motor Type: Brushless
- * Adjustable speed: 6 Levels
- * Optional bit size: 100/150/200mm

Accessories



4.0AH

CORDLESS MIXER

TM-MX905Li



Description

- * Lithium Battery: 20V+20V DC
- * Motor Type: Brushless
- * Adjustable speed: 6 Levels
- * Paddle size: 140*60mm

Accessories



4.0AH

POLISHING MACHINE

TM-TW907Li



Description

- * Lithium Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 2.6kw
- * Adjustable speed: 3 Levels
- * Speed : 0-360rpm

Accessories



4.0AH

POLISHING MACHINE

TM-TW908Li



Description

- * Lithium Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 2.6kw
- * Adjustable speed: 3 Levels
- * Speed : 0-360rpm
- * With pole : 1.5m

Accessories



4.0AH

SNOW BLOWER

TM-SP909Li



BRUSHLESS
MOTOR

20V

Description

- * Lithium Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 800w
- * No-Load speed: 2000rpm
- * Working width: 250mm

Accessories



3.0AH

CORDLESS SHEEP CLIPPERS

TM-CL910Li



BRUSHLESS
MOTOR

20V

Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushless
- * Rated Power: 300W
- * No-load Speed: 2800rpm
- * Working time : 1-1.5H(one charging)

Accessories



4.0AH



BMC CASE

CORDLESS FAN

TM-F905Li

20V



Description

- * Li-ion Battery: 20V DC
- * Fan blade size: 12"
- * Motor Type: Brushed
- * Rated Power: 400w
- * No-Load speed: 2800rpm
- * Rotation angle: 270°
- * With led light

Accessories



3.0AH

CORDLESS RECIPROCATING SAW

TM-RS906Li

20V



Description

- * Lithium Battery: 20V DC
- * Motor Type: Brushed
- * Rated Power: 550w
- * Cutting stroke: 15mm
- * Max Cutting thickness:
150mm(wood)/6mm(metal)
/40mm(plastic)

Accessories



1.5AH



BMC CASE

CORDLESS SEED SPREADER

TM-SE907Li

20V



Description

- * Li-ion Battery: 20V DC
- * Motor Type: Brushed
- * Rated Power: 400w
- * Capacity: 3.3L
- * Max working width : 5m
- * Working area: 800m²

Accessories



3.0AH





FUZHOU TEAMAX POWER TECHNOLOGY CO.,LTD

Factory 1:No.58 Juyuanzhou Industrial Park Fuzhou,China

Tel:+86-591-83054667 Fax:+86-591-83054667

Email:manager@teamaxpower.com

Mobile:+86-13600850700 (wechat/whatsapp)