



TEAMAX
— POWER PRODUCTS —

GARDEN TOOLS



PRODUCT CATALOGUE

2024



COMPANY CULTURE

Spirit: Be transnomal, creative & top-class.
Vision: Create world brand, serve the globe.
Promise: Listen patiently, respond quickly, fulfill strenuously.
Quality: Focus, commitment to excellence, be more professional and sophisticated.

Contents

BRUSH CUTTER	2
TELESCOPIC HIGH POLE SAW	11
HAND PUSH BRUSH CUTTER	12
GASOLINE CHAIN SAW	13
ENGINE LAWN MOWER	21
EARTH AUGER	26
GASOLINE WATER PUMP	28
HEDGE TRIMMER	31
MINI TILLER	32
DIESEL ENGINE MINI TILLER	33
GASOLINE GENERATOR	34
GASOLINE BLOWER	37
HIGH PRESSURE GARDEN SPRAYER	39
OUTBOARD ENGINE	42
GASOLINE POWER SERIES	43
ELECTRIC GRASS TRIMMER	45
ELECTRIC CHAIN SAW	46
ELECTRIC BLOWER & HEDGE TRIMMER	47
ELECTRIC SHREDDER	48





TM-CG260



Engine Type: 2-Stroke, Air-cooled
 Rated Output Power: 0.75kw/7500rpm
 Displacement: 25.4cc



TM-CG330



Engine Type: 2-Stroke, Air-cooled
 Rated Output Power: 0.9kw/6500rpm
 Displacement: 32.6cc



TM-CG430



Engine Type: 2-Stroke, Air-cooled
 Rated Output Power: 1.40kw/6500rpm
 Displacement: 42.7cc



TM-CG520



Engine Type: 2-Stroke, Air-cooled
 Rated Output Power: 1.8kw/6500rpm
 Displacement: 51.7cc



TM-CG520B



Engine Type: 2-Stroke, Air-cooled
 Rated Output Power: 1.80kw/6500rpm
 Displacement: 51.7cc



TM-CG520BV



Engine Type: 2-Stroke, Air-cooled
 Rated Output Power: 1.8kw/6500rpm
 Displacement: 51.7cc



TM-CG430TB



Engine Type: 2-Stroke, Air-cooled
Rated Output Power: 1.4kw/6500rpm
Displacement: 42.7cc




TM-CG520TB



Engine Type: 2-Stroke, Air-cooled
Rated Output Power: 1.8kw/6500rpm
Displacement: 51.7cc



TM-CG520TBV



Engine Type: 2-Stroke, Air-cooled
Rated Output Power: 1.8kw/6500rpm
Displacement: 51.7cc




TM-CG520TU



Engine Type: 2-Stroke, Air-cooled
Rated Output Power: 1.8kw/6500rpm
Displacement: 51.7cc



TM-CG520TN



Engine Type: 2-Stroke, Air-cooled
Rated Output Power: 1.8kw/6500rpm
Displacement: 51.7cc



TM-CG630A



Engine Type: 2-Stroke, Air-cooled
Rated Output Power: 2.4kw/6500rpm
Displacement: 63cc



TM-CG630TB



Engine Type: **2-Stroke, Air-cooled**
 Rated Output Power: **2.4kw/6500rpm**
 Displacement: **63cc**



TM-CG400



Engine Type: **2-Stroke, Air-cooled**
 Rated Output Power: **1.40kw/6500rpm**
 Displacement: **40.7cc**



TM-CG411



Engine Type: **2-Stroke, Air-cooled**
 Rated Output Power: **1.45kw/6500rpm**
 Displacement: **40.2cc**



TM-RBC411



Engine Type: **2-Stroke, Air-cooled**
 Rated Output Power: **1.45kw/6500rpm**
 Displacement: **40.2cc**



TM-CG143R



Engine Type: **2-Stroke, Air-cooled**
 Rated Output Power: **1.6kw/6500rpm**
 Displacement: **41.5cc**



TM-CG541R



Engine Type: **2-Stroke, Air-cooled**
 Rated Output Power: **1.6kw/6500rpm**
 Displacement: **41.5cc**



TM-CGB45



Engine Type: **2-Stroke, Air-cooled**
Rated Output Power: **2.2kw/6500rpm**
Displacement: **41.5cc**



TM-CG139



Engine Type: **4-Stroke, Air-cooled**
Rated Output Power: **0.75kw/7500rpm**
Displacement: **31cc**



TM-CG139A



Engine Type: **4-Stroke, Air-cooled**
Rated Output Power: **0.75kw /7500rpm**
Displacement: **31cc**



TM-CG139B



Engine Type: **4-Stroke, Air-cooled**
Rated Output Power: **0.75kw/7500rpm**
Displacement: **31cc**



TM-CG435



Engine Type: **4-Stroke, Air-cooled**
Rated Output Power: **1.0kw/6500rpm**
Displacement: **35.8cc**




TM-CG450



Engine Type: **4-Stroke, Air-cooled**
Rated Output Power: **1.5kw/6500rpm**
Displacement: **50cc**



TM-CG260TG



Engine Type:	2-Stroke, Air-cooled
Rated Output Power:	0.75kw/7500rpm
Displacement:	25.4cc




TM-CG430TG



Engine Type:	2-Stroke, Air-cooled
Rated Output Power:	1.40kw/6500rpm
Displacement:	42.7cc



TM-CG430TJ



Engine Type:	2-Stroke, Air-cooled
Rated Output Power:	1.40kw/6500rpm
Displacement:	42.7cc



TM-CG330TG



Engine Type:	2-Stroke, Air-cooled
Rated Output Power:	0.9kw/7500rpm
Displacement:	32.6cc



TM-CG520TG



Engine Type:	2-Stroke, Air-cooled
Rated Output Power:	1.80kw/6500rpm
Displacement:	51.7cc



TM-CG520TJ



Engine Type:	2-Stroke, Air-cooled
Rated Output Power:	1.80kw/6500rpm
Displacement:	51.7cc



TM-BG328



Engine Type: **2-Stroke, Air-cooled**
Rated Output Power: **0.81kw/6500rpm**
Displacement: **30.5cc**



TM-BG520A



Engine Type: **2-Stroke, Air-cooled**
Rated Output Power: **1.8kw/6500rpm**
Displacement: **51.7cc**



TM-BG520TB



Engine Type: **2-Stroke, Air-cooled**
Rated Output Power: **1.8kw/6500rpm**
Displacement: **51.7cc**



TM-BG520H



Engine Type: **2-Stroke, Air-cooled**
Rated Output Power: **1.8kw/6500rpm**
Displacement: **51.7cc**



TM-BG435



Engine Type: **4-Stroke, Air-cooled**
Rated Output Power: **1.1kw/6500rpm**
Displacement: **35.8cc**



TM-BG143



Engine Type: **2-Stroke, Air-cooled**
Rated Output Power: **1.6kw/6500rpm**
Displacement: **41.5cc**

Model No.	TM-CG260	TM-CG330	TM-CG430	TM-CG520	TM-CG520B	TM-CG520BV
Engine Model	1E34F	1E36F	1E40F-5	1E44F-5	1E44F-5B	1E44F-5B
Engine Type	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled
Rated Output power	0.75kw/7500rpm	0.9kw/6500rpm	1.40kw/6500rpm	1.8kw/6500rpm	1.80kw/6500rpm	1.8kw/6500rpm
Displacement	25.4cc	32.6cc	42.7cc	51.7cc	51.7cc	51.7cc
Idling Speed	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm
Carburetor	Diaphragm	Diaphragm	Diaphragm	Diaphragm	Diaphragm	Diaphragm
Mixed Fuel Ratio	1:30	1:30	1:30	1:30	1:30	1:30
Fuel Tank Capacity	750ml	900ml	1200ml	1200ml	1200ml	1200ml
Shaft Diameter	26mm	26mm	28mm	28mm	28mm	28mm
Working Shaft Length	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm

Model No.	TM-CG430TB	TM-CG520TB	TM-CG520BV	TM-CG520TU	TM-CG520TN	TM-CG630A
Engine Model	TB43	TB52	TB52	TU52	1E44F-5N	1E48F
Engine Type	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled
Rated Output power	1.40kw/6500rpm	1.8kw/6500rpm	1.80kw/6500rpm	1.80kw/6500rpm	1.80kw/7500rpm	2.4kw/6500rp
Displacement	42.7cc	51.7cc	51.7cc	51.7cc	51.7cc	63cc
Idling Speed	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm
Carburetor	Diaphragm	Diaphragm	Diaphragm	Diaphragm	Diaphragm	Diaphragm
Mixed Fuel Ratio	1:30	1:30	1:30	1:30	1:30	1:30
Fuel Tank Capacity	1200ml	1200ml	1200ml	1200ml	1200ml	1200ml
Shaft Diameter	28mm	28mm	28mm	28mm	28mm	28mm
Working Shaft Length	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm

Model No.	TM-CG630TB	TM-CG400	TM-CG411	TM-RBC411	TM-CG143R	TM-CG541R
Engine Model	1E48F-5B	1E40F-7	1E40F-6(Robin)	1E40F-6(Makita)	143R	541R
Engine Type	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled
Rated Output power	2.4kw/6500rpm	1.40kw/6500rpm	1.45kw/6500rpm	1.45kw/6500rpm	1.6kw/6500rpm	1.6kw/6500rpm
Displacement	63cc	40.7cc	40.2cc	40.2cc	41.5cc	41.5cc
Idling Speed	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm
Carburetor	Diaphragm	Floating Type	Floating Type	Floating Type	Diaphragm	Diaphragm
Mixed Fuel Ratio	1:30	1:30	1:30	1:30	1:30	1:30
Fuel Tank Capacity	1200ml	1000ml	1000ml	1000ml	1000ml	1000ml
Shaft Diameter	28mm	28mm	28mm	28mm	28mm	28mm
Working Shaft Length	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm

Model No.	TM-CGB45	TM-CG139	TM-CG139A	TM-CG139B	TM-CG435	TM-CG450
Engine Model	B450	139F	139F-1	139F-2	GX35	Gx50
Engine Type	2-Stroke,Air-cooled	4-Stroke,Air-cooled	4-Stroke,Air-cooled	4-Stroke,Air-cooled	4-Stroke,Air-cooled	4-Stroke,Air-cooled
Rated Output power	2.2kw/6500rpm	0.75kw/7500rpm	0.75kw/7500rpm	0.75kw/6500rpm	1.0kw/6500rpm	1.5kw/6500rpm
Displacement	41.5cc	31cc	31cc	31cc	35.8cc	50cc
Idling Speed	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm
Carburetor	Diaphragm	Diaphragm	Diaphragm	Diaphragm	Diaphragm	Diaphragm
Mixed Fuel Ratio	1:30	-	-	-	-	-
Fuel Tank Capacity	900ml	630ml	630ml	630ml	630ml	750ml
Shaft Diameter	28mm	26mm	26mm	26mm	28mm	28mm
Working Shaft Length	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm

Model No.	TM-CG260TG	TM-CG330TG	TM-CG430TG	TM-CG520TG	TM-CG430TJ	TM-CG520TJ
Engine Model	1E34FG	1E36FG	1E40F-5G	1E44F-5G	1E40F-5J	1E44F-5J
Engine Type	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled
Rated Output power	0.75kw/7500rpm	0.9kw/7500rpm	1.40kw/6500rpm	1.80kw/6500rpm	1.40kw/6500rpm	1.8kw/6500rpm
Displacement	25.4cc	32.6cc	42.7cc	51.7cc	42.7cc	51.7cc
Idling Speed	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm
Carburetor	Diaphragm	Diaphragm	Diaphragm	Diaphragm	Diaphragm	Diaphragm
Mixed Fuel Ratio	1:30	1:30	1:30	1:30	1:30	1:30
Fuel Tank Capacity	750ml	750ml	1200ml	1200ml	1200ml	1200ml
Shaft Diameter	26mm	26mm	28mm	28mm	28mm	28mm
Working Shaft Length	1500mm	1500mm	1500mm	1500mm	1500mm	1500mm

Model No.	TM-BG328	TM-BG520A	TM-BG520TB	TM-BG520H	TM-BG435	TM-BG143
Engine Model	1E36FB	1E44F-5	1E44F-5	1E44F-5	GX35	143R
Engine Type	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	4-Stroke,Air-cooled	2-Stroke,Air-cooled
Rated Output power	0.81kw/6500rpm	1.8kw/6500rpm	1.8kw/6500rpm	1.8kw/6500rpm	1.1kw/6500rpm	1.6kw/6500rpm
Displacement	30.5 CC	51.7cc	51.7cc	51.7cc	35.8 cc	41.5cc
Idling Speed	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm	3000(±200)rpm	3000(+200)rpm	3000(±200)rpm
Carburetor	Float	Diaphragm	Float	Diaphragm	Diaphragm	Diaphragm
Mixed Fuel Ratio	1:30	1:30	1:30	1:30	-	1:30
Fuel Tank Capacity	1500ml	1200ml	1200ml	1200ml	1200ml	1200ml
Shaft Diameter	26mm	26mm	26mm	26mm	26mm	26mm
Working Shaft Length	1350mm	1350mm	1350mm	1350mm	1350mm	1350mm

TM-MT430




Model No.	TM-MT430
Engine Model	1E40F-5
Engine Type	2-Stroke, Air-cooled
Rated Output power	1.40kw/6500rpm
Displacement	42.7cc
Idling Speed	3000(±200)rpm
Carburator	Diaphragm
Mixed Fuel Ratio	1:30
Fuel Tank Capacity	1200ml
Net weight	10.5kg

Multi-purpose Working Head:



TM-HTP26

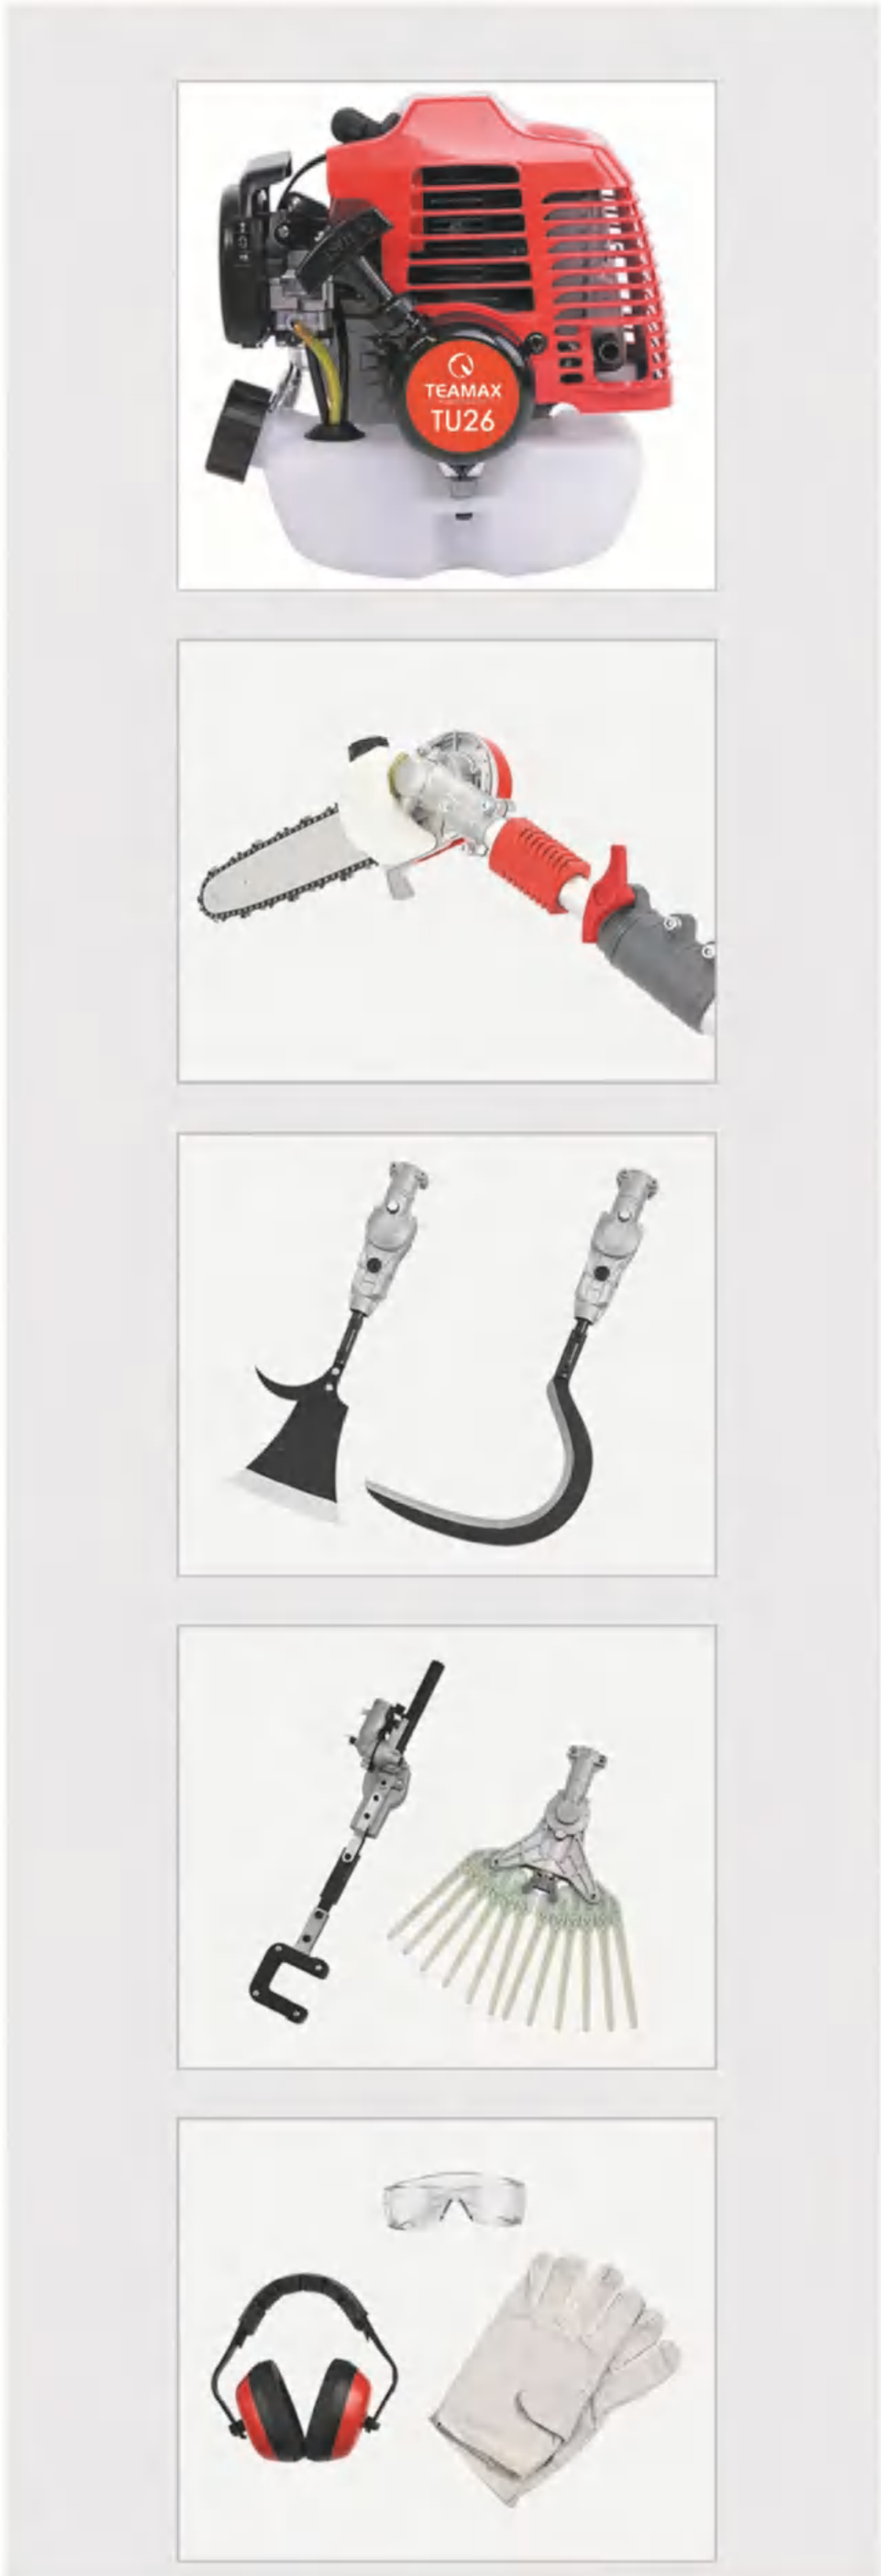

Model No.	TM-HTP26
Engine Model	1E34F or TU26
Engine Type	2-Stroke,Air-cooled
Rated Output power	0.75kw/7500rpm
Displacement	26cc
Idling Speed	3000(±200)rpm
Telescopic scope	2.2m-4.5m



High quality multi-function high branch saw, small size, light weight, convenient operation, suitable for efficient and flexible mowing on steep slopes


TM-WBC520A

TM-WBC435

Model No.	TM-WBC520A	TM-WBC435
Engine model	1E44F-5	GX35
Engine type	2-Stroke air-cooled	2-Stroke air-cooled
Rated power	1.8kw/6500rpm	1.1kw/6500rpm
Displacement	51.7cc	35.8cc
Idling Speed	3000(±200)rpm	3000(±200)rpm
Net weight	18.0kg	18.0kg


TM-WBC520B

TM-WBC520C

Model No.	TM-WBC520B	TM-WBC520C
Engine model	1E44F-5	1E44F-5
Engine type	2-Stroke air-cooled	2-Stroke air-cooled
Rated power	1.8kw/6500rpm	1.8kw/6500rpm
Displacement	51.7cc	51.7cc
Idling Speed	3000(±200)rpm	3000(±200)rpm
Net weight	18.0kg	18.0kg





TM-CS2500



Rated Output Power: 0.9kw/7500rpm

Displacement: 25.4cc

Guide Bar Size: 10"(25cm)/12"(30cm)



TM-CS2511



Rated Output Power: 1.1kw/7500rpm

Displacement: 25cc

Guide Bar Size: 10"(25cm)/12"(30cm)



TM-CS3800



Rated Output Power: 1.4kw/7500rpm

Displacement: 38.2cc

Guide Bar Size: 14"(35cm)/16"(40cm)



TM-CS4000



Rated Output Power: 1.6kw/7500rpm

Displacement: 39.6cc

Guide Bar Size: 16"(40cm)



TM-CS4500



Rated Output Power: 1.8kw/7500rpm

Displacement: 45cc

Guide Bar Size: 16"(40cm)/18"(45cm)



TM-CS5200



Rated Output Power: 2.2kw/7500rpm

Displacement: 52cc

Guide Bar Size: 18"(45cm)/20"(50cm)



TM-CS5201



Rated Output Power: **2.2kw/7500rpm**

Displacement: **52cc (Option 45cc, 58cc, 62cc)**

Guide Bar Size: **18"(45cm)/20"(50cm)**



TM-CS5202



Rated Output Power: **2.2kw/7500rpm**

Displacement: **52cc (Option 45cc, 58cc, 62cc)**

Guide Bar Size: **18"(45cm)/20"(50cm)**



TM-CS5800



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc, 52cc, 62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5801




Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc, 52cc, 62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5802



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc, 52cc, 62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5803



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc, 52cc, 62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5804



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5805



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5806



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5807



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5808



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5809



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5810



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5811



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5812



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5813



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5814



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-CS5815



Rated Output Power: **2.4kw/7500rpm**

Displacement: **58cc (Option 45cc,52cc,62cc)**

Guide Bar Size: **20"(50cm)/22"(55cm)**



TM-MS180



Rated Output Power: 1.5kw/9000rpm
 Displacement: 31.8cc
 Guide Bar Size: 14"(35cm)/16"(40cm)



TM-MS250



Rated Output Power: 2.3kw/8500rpm
 Displacement: 45.8cc
 Guide Bar Size: 16"(40cm)/18"(45cm)



TM-MS381



Rated Output Power: 3.3kw/7000rpm
 Displacement: 72.2cc
 Guide Bar Size: 20"(50cm)/24"(60cm)



TM-MS660



Rated Output Power: 5.2kw/7000rpm
 Displacement: 92cc
 Guide Bar Size: 30"(75cm)/36"(90cm)



TM-MS070



Rated Output Power: 4.8kw/6500rpm
 Displacement: 105cc
 Guide Bar Size: 36"(90cm)/42"(105cm)



TM-CS365



Rated Output Power: 3.4kw/6500rpm
 Displacement: 65cc
 Guide Bar Size: 20"(50cm)/22"(55cm)

Model No.	TM-CS2500	TM-CS2511	TM-CS3800	TM-CS4000	TM-CS4500	TM-CS5200
Cylinder bore	Ø34mm	Ø34mm	Ø39mm	Ø40mm	Ø43mm	Ø45mm
Engine Type	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled
Rated Output power	0.9kw/7500rpm	1.1kw/7500rpm	1.4kw/7500rpm	1.6kw/7500rpm	1.8kw/7500rpm	2.2kw/7500rpm
Displacement	25.4cc	25cc	38.2cc	39.6cc	45cc	52cc
Idling Speed	3200(±200)rpm	3000(±200)rpm	3300(±200)rpm	3300(±200)rpm	3300(±200)rpm	3300(±200)rpm
Guide Bar size	10"/12"	10"/12"	14"/16"	16"	16"/18"	18"/20"
Chain Pitch	3/8"	3/8"	3/8"	3/8"	0.325"	0.325"
Fuel Tank Capacity	180ml	190ml	320ml	410ml	550ml	550ml
Oil Tank Capacity	120ml	140ml	210ml	240ml	260ml	260ml
N.W.	3.0KGS	2.5KGS	4.5KGS	4.8KGS	4.8KGS	5.0KGS

Model No.	TM-CS5201	TM-CS5202	TM-CS5800	TM-CS5801	TM-CS5802	TM-CS5803
Cylinder bore	Ø45mm	Ø45mm	Ø45.2mm	Ø45.2mm	Ø45.2mm	Ø45.2mm
Engine Type	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled
Rated Output power	2.2kw/7500rpm	2.2kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm
Displacement	52cc (Option 45cc,58cc,62cc)	52cc (Option 45cc,58cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)
Idling Speed	3300(±200)rpm	3300(±200)rpm	3300(±200)rpm	3300(±200)rpm	3300(±200)rpm	3300(±200)rpm
Guide Bar size	18"/20"	18"/20"	18"/20"	18"/20"	18"/20"	18"/20"
Chain Pitch	0.325"	0.325"	0.325"	0.325"	0.325"	0.325"
Fuel Tank Capacity	550ml	550ml	550ml	550ml	550ml	550ml
Oil Tank Capacity	260ml	260ml	260ml	260ml	260ml	260ml
N.W.	5.0KGS	5.0KGS	5.0KGS	5.0KGS	5.0KGS	5.0KGS

Model No.	TM-CS5804	TM-CS5805	TM-CS5806	TM-CS5807	TM-CS5808	TM-CS5809
Cylinder bore	Ø45.2mm	Ø45.2mm	Ø45.2mm	Ø45.2mm	Ø45.2mm	Ø45.2mm
Engine Type	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled
Rated Output power	2.4kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm
Displacement	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)
Idling Speed	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm
Guide Bar size	20"/22"	20"/22"	20"/22"	20"/22"	20"/22"	20"/22"
Chain Pitch	0.325"	0.325"	0.325"	0.325"	0.325"	0.325"
Fuel Tank Capacity	550ml	550ml	550ml	550ml	550ml	550ml
Oil Tank Capacity	260ml	260ml	260ml	260ml	260ml	260ml
N.W.	5.0KGS	5.0KGS	5.0KGS	5.0KGS	5.0KGS	5.0KGS

Model No.	TM-CS5810	TM-CS5811	TM-CS5812	TM-CS5813	TM-CS5814	TM-CS5815
Cylinder bore	Ø45.2mm	Ø45.2mm	Ø45.2mm	Ø45.2mm	Ø45.2mm	Ø45.2mm
Engine Type	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled
Rated Output power	2.4kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm	2.4kw/7500rpm
Displacement	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)	58cc (Option 45cc,52cc,62cc)
Idling Speed	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm
Guide Bar size	20"/22"	20"/22"	20"/22"	20"/22"	20"/22"	20"/22"
Chain Pitch	0.325"	0.325"	0.325"	0.325"	0.325"	0.325"
Fuel Tank Capacity	550ml	550ml	550ml	550ml	550ml	550ml
Oil Tank Capacity	260ml	260ml	260ml	260ml	260ml	260ml
Net Weight	5.0KGS	5.0KGS	5.0KGS	5.0KGS	5.0KGS	5.0KGS

Model No.	TM-MS180	TM-MS250	TM-MS381	TM-MS660	TM-MS070	TM-CS365
Cylinder bore	Ø38mm	Ø40mm	Ø52mm	Ø54mm	Ø58mm	Ø48mm
Engine Type	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled	2-Stroke,Air-cooled
Rated Output power	1.5kw/9000rpm	2.3kw/8500rpm	3.3kw/7000rpm	5.2kw/7000rpm	4.8kw/6500rpm	3.4kw/6500rpm
Displacement	31.8cc	45.8cc	72.2cc	92cc	105cc	65cc
Idling Speed	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm	3300(+200)rpm
Guide Bar size	14"/16"	16"/18"	20"/24"	30"/36"	36"/42"	20"/22"
Chain Pitch	3/8"	3/8"	3/8"	3/8"	0.404"	3/8"
Fuel Tank Capacity	250 ml	470 ml	680 ml	680 ml	1200 ml	770 ml
Oil Tank Capacity	145 ml	200 ml	360 ml	360 ml	530 ml	420 ml
Net Weight	4.3KGS	4.8KGS	9.0KGS	10.0KGS	14.0KGS	6.5KGS





Chinese Engine (Basic Model)



Model No.	TM-L400T1 (Hand push) TM-L400Z1 Self-propelled)	TM-L460T1 (Hand push) M-L460Z1 (Self-propelled)	TM-L500T1 (Hand push) T-L500Z1 (Self-propelled)	TM-L560T1 (Hand push) TM-L560Z1 (Self-propelled)
Cutting width	405mm(16")	460mm(18")	510mm(20")	560mm(22")
Drive system	Hand push/Self-propelled	Hand push/Self-propelled	Hand push/Self-propelled	Hand push/Self-propelled
Engine Type	4-Stroke,OHV	4-Stroke,OHV	4-Stroke,OHV	4-Stroke,OHV
Engine Model	TM1P65	TM1P65	TM1P70	TM1P70
Engine Power	5.0HP	5.0HP	6.0HP	6.0HP
Displacement	139cc	139cc	173cc	173cc
Start method	Recoil	Recoil	Recoil	Recoil
Idle speed	2800rpm	2800rpm	2800rpm	2800rpm
Cuting height	17-60mm,8adjustment	25-70mm,8adjustment	20-65mm,8adjustment	30-85mm,8adjustment
Wheel Diameter	Front:6inch Rear:8inch	Front:7inch Rear:10inch	Front:7inch Rear:10inch	Front:7inch Rear:10inch
Fuel tank capacity	1.0L	1.3L	1.3L	1.3L
Grass bag capacity	40L(fabric)	60L(fabric)	60L(fabric)	60L(fabric)
Discharge	Rear	Rear or 4in1 with mluch	Rear or 4in1 with mluch	Rear or 4in1 with mluching
Deck	Metal	Metal	Metal	Metal
G.W: /N.W:	25/26kgs	31/33kgs	32/34kgs	38/40kgs

Chinese Engine (Deluxe Model)



Model No.	TM-L560Z3(Self-propelled) TM-L400Z2(Self-propelled)	TM-L460T2(Hand push) TM-L460Z2(Self-propelled)	TM-L500T2(Hand push) TM-L500Z2(Self-propelled)	TM-L560T2(Hand push) TM-L560Z2(Self-propelled)
Cutting width	405mm(16")	460mm(18")	510mm(20")	560mm(22")
Drive system	Hand push/Self-propel	Hand push/Self-prope	Hand push/Self-propel	Hand push/Self-propelled
Engine Type	4-Stroke,OHV	4-Stroke,OHV	4-Stroke,OHV	4-Stroke,OHV
Engine Model	TM1P65D	TM1P65D	TM1P70D	TM1P70D
Engine Power	5.0HP	5.0HP	6.0HP	6.0HP
Displacement	139cc	139cc	173cc	173cc
Start method	Recoil	Recoil	Recoil	Recoil
Idle speed	2800rpm	2800rpm	2800rpm	2800rpm
Cuting height	17-60mm,8adjustment	25-70mm,8adjustment	20-65mm,8adjustment	30-85mm,8adjustment
Wheel Diameter	Front:6inch Rear:8inch	Front:7inch Rear:10inch	Front:7inch Rear:10inch	Front:7inch Rear:10inch
Fuel tank capacity	1.0L	1.3L	1.3L	1.3L
Grass bag capacity	40L(fabric)	60L(Half-plastic)	60L(Half-plastic)	60L(Half-plastic)
Discharge	Rear	Rear	Rear or 4in1 with mluch	Rear or 4in1 with mluching
Deck	Metal	Metal with Front bump	Metal with Front bump	Metal with Front bumper
G.W: /N.W:	25/26kgs	31/33kgs	32/34kgs	38/40kgs


Loncin Engine



Model No.	TM-L400T3(Hand push) TM-L400Z3(Self-propelled)	TM-L460T3(Hand push) TM-L460Z3(Self-propelled)	TM-L500T3(Hand push) TM-L500Z3(Self-propelled)	TM-L560T3(Hand push) TM-L560Z3(Self-propelled)
Cutting width	405mm(16")	460mm(18")	510mm(20")	560mm(22")
Drive system	Hand push/Self-propel	Hand push/Self-propel	Hand push/Self-propel	Hand push/Self-propelled
Engine Type	4-Stroke,OHV	4-Stroke,OHV	4-Stroke,OHV	4-Stroke,OHV
Engine Model	LC1P65FE	LC1P65FE	LC1P70FA	LC1P70FA
Engine Power	2.4kw	2.4kw	3.4kw	3.4kw
Displacement	139cc	139cc	196cc	196cc
Start method	Recoil	Recoil	Recoil	Recoil
Idle speed	2800rpm	2800rpm	2800rpm	2800rpm
Cuting height	25-70mm,8adjustment	17-60mm,8adjustment	20-65mm,8adjustment	30-85mm,8adjustment
Wheel Diameter	Front:6inch Rear:8inch	Front:7inch Rear:10inch	Front:7inch Rear:10inch	Front:7inch Rear:10inch
Fuel tank capacity	1.0L	1.3L	1.3L	1.3L
Grass bag capacity	40L(fabric)	60L(Half-plastic)	60L(Half-plastic)	60L(Half-plastic)
Discharge	Rear	Rear or 4in1 with mluch	Rear or 4in1 with mluch	Rear or 4in1 with mulching
Deck	Metal	Metal with Front bump	Metal with Front bump	Metal with Front bumper
G.W: /N.W:	25/26kgs	31/33kgs	32/34kgs	38/40kgs



Model No.	TM-ML350	TM-ML400
Cutting width	350mm(14")	405mm(16")
Drive system	Hand push	Hand push
Material composition	65Mn	65Mn
Wheel material	Aluminium	Aluminium
Gear	Metal	Metal
Blade	Metal	Metal
G.W: /N.W:	9.5/10.5kgs	10.0/11.0kgs

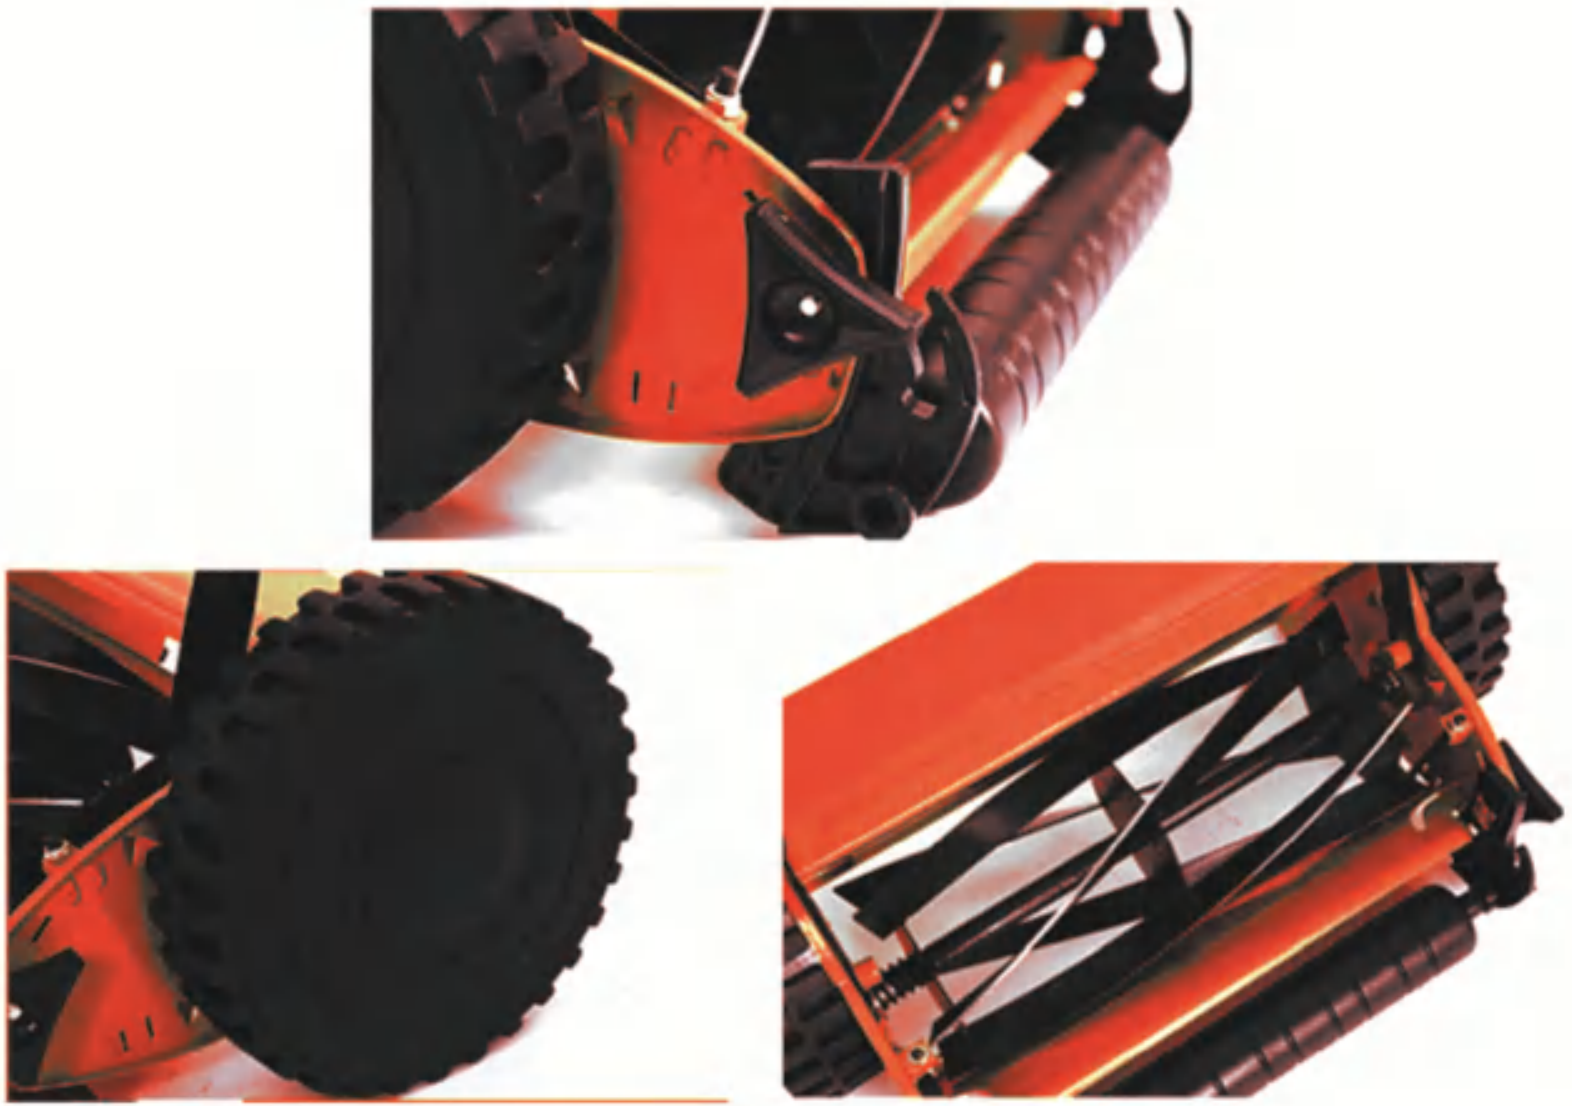


TM-EA520A

TM-EA520B

TM-EA520C

ENGINE Model	Engine Type	Displacement	Rated Power	Mixed Fuel Ratio	Optional Drill Length	Optional Bit Diameter
1E44F-5	2-stroke,Air-cooled	52CC	1.8kw(2.5hp)	1:30	80/100/120/140cm	10/15/20/25cm

EARTH AUGER BITS



Extender Pipe


Adaptor



TM-EA630A



TM-EA630B



TM-EA630C

ENGINE Model	Engine Type	Displacement	Rated Power	Mixed Fuel Ratio	Optional Drill Length	Optional Bit Diameter
1E48	2-stroke,Air-cooled	63 CC	2.5kw(3.0hp)	1:30	80/100/120/140cm	10-30cm

TM-EA196CC



ENGINE Model	196CC Loncin en
Engine Type	4-stroke,Air-coole
Rated Power	4.8kw(6.5HP)
Optional Drill Length	80/100/120/140c
Optional Bit Dimeter	30-60cm


TM-170F-1

TM-170F-2

TM-170F-3

TM-170F-4

Model No.	TM-170F-1	TM-170F-2	TM-170F-3	TM-170F-4
Engine type	Air-cooled 4 stroke OHV single cylinder			
Max.power output	7.0HP/3600rpm	7.0HP/3600rpm	7.0HP/3600rpm	7.5HP/3600rpm
Displacement	212cc	212cc	212cc	225cc
Max.Torque	12.5Nm	12.5Nm	12.5Nm	12.5Nm
Starting system	Recoil	Recoil	Recoil	Recoil
Fuel tank capacity	3.6L	3.6L	3.6L	3.6L
Oil capacity	0.6L	0.6L	0.6L	0.6L
N.W	17.0kgs	17.0kgs	17.0kgs	17.3kgs



TM-WP25A/WP40A



TM-WP25B/WP40B

Model No.	TM-WP25A	TM-WP40A	TM-WP25B	TM-WP40B
Engine type	Single cylinder 2-stroke Air cooled			
Max.power output	1.4kw/6500rpm	1.4kw/6500rpm	1.4kw/6500rpm	1.4kw/6500rpm
Displacement	42.7cc	42.7cc	42.7cc	42.7cc
Water outlet size	25mm(1")	40mm(1.5")	25mm(1")	40mm(1.5")
Starting system	Recoil	Recoil	Recoil	Recoil
Max Lift Height	30m	30m	30m	30m
Suction	8m	8m	8m	8m
N.W	6.5kgs	6.5kgs	6.5kgs	6.5kgs



TM-WP25C/WP40C



TM-WP40D(2in1)

	TM-WP25C	TM-WP40C	TM-WP40D(2in1)
Engine type	4-Stroke(GX35)	4-Stroke(GX35)	Single cylinder2-stroke Air cooled
Max.power output	1.1 kw/6500rpm	1.1 kw/6500rpm	1.4kw/6500rpm
Displacement	35.8cc	35.8cc	42.7cc
Water outlet size	25mm(1")	40mm(1.5")	25mm(1")&40mm(1.5")
Starting system	Recoil	Recoil	Recoil
Max Lift Height	30m	30m	30m
Suction	8m	8m	8m
N.W	6.5kgs	6.5kgs	6.5kgs



2"3"4"Water Pump



2"(High-pressure)

Model No.	TM-WP50A	TM-WP80A	TM-WP100A	TM-WP50B(High-pressure)
Water outlet size	50mm(2")	80mm(3")	100mm(4")	50mm(2")
Flow	30 (m ³ /h)	59 (m ³ /h)	78 (m ³ /h)	29 (m ³ /h)
Lift total	27m	26m	22m	60m
Max.suction	7m	7m	7m	7 m
Engine model	TM-170F	TM-170F	TM-170F	TM-170F
Max.power output	7.0HP/3600rpm	7.0HP/3600rpm	7.0HP/3600rpm	7.0HP/3600rpm
Displacement	212cc	212cc	212cc	212cc
Fuel tank capacity	3.6L	3.6L	3.6L	3.6L
Oil capacity	0.6L	0.6L	0.6L	0.6L



TM-WP520F



TM-WP435F

Model No.	Water outlet size	Engine type	Engine displacement	Engine power	Max Lift	Sction
TM-WP520F	1.5inch	2-Stroke Air-cooled	52cc	1.8kw/6500rpm	35m	7m
TM-WP435F	1.5inch	4-Stroke Air-cooled	35.8cc	1.1kw/6500rpm	35m	7m


TM-HT230

Model No.	TM-HT230
Engine model	1E32F
Engine type	2-Stroke,air-cooled
Displacement	22.5cc
Rated power	0.75kw/7500rpm
Cutting length	600mm
N.W	5.8kgs


TM-HT230A

Model No.	TM-HT230A
Engine model	1E32FB
Engine type	2-Stroke,air-cooled
Displacement	22.5cc
Rated power	0.75kw/7500rpm
Cutting length	600mm
N.W	5.8kgs


TM-HT230B

Model No.	TM-HT230B
Engine model	1E32F
Engine type	2-Stroke,air-cooled
Displacement	22.5cc
Rated power	0.75kw/7500rpm
Cutting length	600mm
N.W	6.5kgs


TM-TP260

Model No.	TM-TP260
Engine model	1E34F
Engine type	2-Stroke,air-cooled
Displacement	25.4cc
Rated power	0.75kw/7500rpm
Cutting length	600mm
N.W	11.5kgs



Model No.	TM-WG520A	TM-WG520B
Engine model	1E44F-5	1E44F-5
Engine type	2-Stroke,air-cooled	2-Stroke,air-cooled
Displacement	52cc	52cc
Rated power	1.8kw/6500rpm	1.8kw/6500rpm
Working width	30cm	30cm
Working depth	10-15cm	10-15cm



Model No.	TM-WG630	TM-WG144F
Engine model	1E48F	144F
Engine type	2-Stroke,air-cooled	4-Stroke, Air Cooled
Displacement	63cc	58cc
Rated power	2.4kw/6500rpm	2.2kw/6500rpm
Working width	35cm	35cm
Working depth	15-20cm	15-20cm

TM-WG950



Model No.	TM-WG950
Engine Model	170F GASOLINE ENGINE
Starting mode	Manual starter,Recoil
Rated Output Power	7.0HP/3600rpm
Gear Box	Full Cast Iron
Drive type	Chain + Belt
Clutch Type	Tension Clutch
Shifting	1,0,2,-1
Blade Q'ty	3pcs*4 group,total 24pcs
Wheel	4.00-8
Tilling Width	95cm
Tilling Depth	≥10cm

TM-WG1000



Model No.	TM-WG1000
Engine Model	170F GASOLINE ENGINE
Starting mode	Manual starter,Recoil
Rated Output Power	7.0HP/3600rpm
Gear Box	Aluminium alloy + die cast iron
Drive type	Gear
Clutch Type	Friction plate clutch
Shifting	1,0,2,-1
Blade Q'ty	3pcs*4 group,total 24pcs
Wheel	4.00-8
Tilling Width	100cm
Tilling Depth	≥10cm

TM-WG1000D
 TM-WG1050D
 TM-WG1350D



Model No.	TM-WG1000D	TM-WG1050D	TM-WG1350D
Engine Model	173F DIESEL ENGINE	178F DIESEL ENGINE	186FA DIESEL ENGINE
Starting mode	Manual starter,Recoil		
Rated Output Power	4.0HP/3600rpm	6.0HP/3600rpm	9.0HP/3600rpm
Gear Box	Aluminium alloy + die cast iron		
Drive type	Gear	Gear	Gear
Clutch Type	Friction plate clutch		
Shifting	1,0,2,-1	1,0,2,-1	1,0,2,-1
Blade Q'ty	3pcs*4 group,total 24pcs	4pcs*4 group,total 32pcs	
Wheel	4.00-8	4.00-8	4.00-8
Tilling Width	100cm	105cm	135cm
Tilling Depth	≥10cm	≥10cm	≥10cm



TM-GP2000A(E)
TM-GP2500A(E)
TM-GP3000A(E)
TM-GP3500A(E)

TM-GP2000B(E)
TM-GP2500B(E)
TM-GP3000B(E)
TM-GP3500B(E)



Model No.	TM-GP2000A(E)	TM-GP2500A(E)	TM-GP3000A(E)	TM-GP3500A(E)
Rated Frequency	50/60Hz			
Rated Voltage	220/380v	220/380v	220/380v	220/380v
Rated Power	1.5kw	2.0kw	2.5kw	3.0kw
Max.Power	1.8kw	2.2kw	2.8kw	3.5kw
Engine type	air-cooled,4-stroke(OHV)			
Engine Power	6.5HP/196cc	7.0HP/212cc	7.0HP/212cc	7.0HP/212cc
Fuel tank capacity	15L			
Oil tank capacity	0.6L	0.6L	0.6L	0.6L
Starting system	Manual or Electric			

Model No.	TM-GP2000B(E)	TM-GP2500B(E)	TM-GP3000B(E)	TM-GP3500B(E)
Rated Frequency	50/60Hz			
Rated Voltage	220/380v	220/380v	220/380v	220/380v
Rated Power	1.5kw	2.0kw	2.5kw	3.0kw
Max.Power	1.8kw	2.2kw	2.8kw	3.5kw
Engine type	air-cooled,4-stroke(OHV)			
Engine Power	6.5HP/196cc	7.0HP/212cc	7.0HP/212cc	7.0HP/212cc
Fuel tank capacity	15L			
Oil tank capacity	0.6L	0.6L	0.6L	0.6L
Starting system	Manual or Electric			



TM-GP2000C(E)
TM-GP2500C(E)
TM-GP3000C(E)
TM-GP3500C(E)



TM-GP2000D(E)
TM-GP2500D(E)
TM-GP3000D(E)
TM-GP3500D(E)

Model No.	TM-GP2000C(E)	TM-GP2500C(E)	TM-GP3000C(E)	TM-GP3500C(E)
Rated Frequency	50/60Hz			
Rated Voltage	220/380v	220/380v	220/380v	220/380v
Rated Power	1.5kw	2.0kw	2.5kw	3.0kw
Max.Power	1.8kw	2.2kw	2.8kw	3.5kw
Engine type	air-cooled,4-stroke(OHV)			
Engine Power	6.5HP/196cc	7.0HP/212cc	7.0HP/212cc	7.0HP/212cc
Fuel tank capacity	15L			
Oil tank capacity	0.6L	0.6L	0.6L	0.6L
Starting system	Manual or Electric			

Model No.	TM-GP2000D(E)	TM-GP2500D(E)	TM-GP3000D(E)	TM-GP3500D(E)
Rated Frequency	50/60Hz			
Rated Voltage	220/380v	220/380v	220/380v	220/380v
Rated Power	1.5kw	2.0kw	2.5kw	3.0kw
Max.Power	1.8kw	2.2kw	2.8kw	3.5kw
Engine type	air-cooled,4-stroke(OHV)			
Engine Power	6.5HP/196cc	7.0HP/212cc	7.0HP/212cc	7.0HP/212cc
Fuel tank capacity	15L			
Oil tank capacity	0.6L	0.6L	0.6L	0.6L
Starting system	Manual or Electric			

TM-GP6500A(E)

TM-GP7500A(E)

TM-GP9500A(E)



Model No.	TM-GP6500A(E)	TM-GP7500A(E)	TM-GP9500A(E)
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Rated Voltage	220/380v	220/380v	220/380v
Rated Power	5.0kw	6.0kw	7.5kw
Max.Power	5.5kw	6.5kw	8.0kw
Engine type	air-cooled,4-stroke(OHV)	air-cooled,4-stroke(OHV)	air-cooled,4-stroke(OHV)
Engine Power	15.0HP/420cc	15.0HP/420cc	17.0HP/460cc
Fuel tank capacity	25L	25L	25L
Oil tank capacity	1.1L	1.1L	1.1L
Starting system	Manual or Electric		

**TM-EB260****TM-EBV260A****TM-EB260A**

Model No.	TM-EB260	TM-EB260A	TM-EBV260A
Engine type	2-Stroke, air-cooled	2-Stroke, air-cooled	2-Stroke, air-cooled
Displacement	25.4cc	25.4cc	25.4cc
Rated power	0.75kw/7500rpm	0.75kw/7500rpm	0.75kw/7500rpm
Air volume	$\geq 0.2\text{m}^3/\text{s}$	$\geq 0.2\text{m}^3/\text{s}$	$\geq 0.2\text{m}^3/\text{s}$
Air speed	$\geq 70\text{m}^3/\text{s}$	$\geq 70\text{m}^3/\text{s}$	$\geq 70\text{m}^3/\text{s}$

**TM-EB260B****TM-EBV260B****TM-EB430**

Model No.	TM-EB260B	TM-EBV260B	TM-EB430
Engine type	2-Stroke, air-cooled	2-Stroke, air-cooled	2-Stroke, air-cooled
Displacement	25.4cc	25.4cc	25.4cc
Rated power	0.75kw/7500rpm	0.75kw/7500rpm	0.75kw/7500rpm
Air volume	$\geq 0.2\text{m}^3/\text{s}$	$\geq 0.2\text{m}^3/\text{s}$	$\geq 0.2\text{m}^3/\text{s}$
Air speed	$\geq 70\text{m}^3/\text{s}$	$\geq 70\text{m}^3/\text{s}$	$\geq 70\text{m}^3/\text{s}$


TM-EB500

TM-EB975

Model No.	TM-EB430	TM-EB500
Engine type	2-Stroke, air-cooled	2-Stroke, air-cooled
Displacement	52cc	75.6cc
Rated power	1.8kw/7500rpm	3.1kw/6500rpm
Air volume	≥0.3m³/s	≥0.4m³/s
Air speed	≥70m³/s	≥90m³/s


TM-EB9900

TM-EB985

Model No.	TM-EB9900	TM-EB985
Engine type	4-Stroke, air-cooled	2-Stroke, air-cooled
Displacement	75.6cc	75.6cc
Rated power	2.2kw/7500rpm	3.1kw/6500rpm
Air volume	≥0.4m³/s	≥0.4m³/s
Air speed	≥70m/s	≥90m³/s



TM-PTU26



TM-PGX35

Model No.	TM-PTU26	TM-PGX35
Engine model	TU-26, 2-Stroke	GX35 4-Stroke
Engine output power	0.81kw/7500rpm	1.1kw/7500rpm
Displacement	25.6cc	35.8cc
Working Pressure	1.5-2.5Mpa	1.5-2.5Mpa
N.W/G.W	6.5kg/7.5kg	7.0kg/8.0kg



**TM-HTP22B/TM-HTP30
(BELT CONNECTION)**



**TM-HTP22D/TM-HTP30D
(DIRECT CONNECTION)**

Model No.	TM-HTP22B	TM-HTP30	TM-HTP22D	TM-HTP30D
Engine model	TM-170F	TM-170F	TM-170F	TM-170F
Engine output power	7.0HP/3600rpm	7.0HP/3600rpm	7.0HP/3600rpm	7.0HP/3600rpm
Displacement	22mm	30mm	22mm	30mm
Working Pressure	1.5-3.0Mpa	1.5-3.0Mpa	1.5-3.0Mpa	2.5-4.0Mpa
Suction volume	14-22L/min	25-35L/min	14-22L/min	22-40L/min
N.W/G.W	26/27kgs	27/28kgs	26/27kgs	27/28kgs

TM-P708



TM-P767



TM-P800



Model No.	TM-P708	TM-P767	TM-P800
Tank capacity	25L	25L	25L
Engine model	TU-26,2-Stroke	TU-26,2-Stroke	TU-26,2-Stroke
Engine output power	0.81kw/7500rpm	0.81kw/7500rpm	0.81kw/7500rpm
Working Pressure	1.5-2.5Mpa	1.5-2.5Mpa	1.5-2.5Mpa
Working Flow	8L/min	8L/min	8L/min
N.W/G.W	9.5/11.0kgs	9.5/11.0kgs	10.0/11.5kgs

TM-P900



TM-P908



TM-P4035



Model No.	TM-P900	TM-908	TM-P4035
Tank capacity	30L	30L	25L
Engine model	TU-26,2-Stroke	GX35,4-Stroke	GX35,4-Stroke
Engine output power	0.81kw/7500rpm	1.1kw/7500rpm	1.1kw/7500rpm
Working Pressure	1.5-2.5Mpa	1.5-2.5Mpa	1.5-2.5Mpa
Working Flow	8L/min	8L/min	8L/min
N.W/G.W	11.0/12.5kgs	11.0/12.5kgs	10.5/12.0kgs

TM-3WF-3A 14L/26L



TM-3WF-3C



Model No.	TM-3WF-3A 14L	TM-3WF-3A 26L	TM-3WF-3C
Tank capacity	14L	26L	26L
Engine model	1E40F-3Z	1E40F-3Z	TU43
Engine type	2-Storke air-cooled	2-Storke air-cooled	2-Storke air-cooled
Rated power	2.13kw/6500rpm	2.13kw/6500rpm	1.4kw/6500rpm
Displacement	41.5cc	41.5cc	42.7cc
Range	≥12m	≥12m	≥12m
N.W/G.W	11/12kgs	11/12kgs	11/12kgs

TM-3WF-3S



TM-3WF-30



Model No.	TM-3WF-3S	TM-3WF-30
Tank capacity	26L	19L
Engine model	GX35	1E52F
Engine type	4-Storke air-cooled	2-Storke air-cooled
Rated power	1.1kw/6500rpm	3.6kw/6500rpm
Displacement	35.8cc	77cc
Range	≥12m	≥15m
N.W/G.W	11/12kgs	13/14kgs


TM-OE520

TM-OE630

Model No.	TM-OE520	TM-OE630
Engine model	1E44F	1E48F
Engine type	2-Stroke air-cooled	2-Stroke air-cooled
Rated power	1.8kw/6500rpm	2.4kw/6500rpm
Displacement	52cc	63cc
Transom height	400mm	400mm
Propeller Range	3-7inch	3-7inch
N.W/G.W	10/11kgs	11/12kgs


TM-OE144F

TM-OE170F

Model No.	TM-OE144F	TM-OE170F
Engine model	144F	LC1P70F
Engine type	4-Stroke air-cooled	4-Stroke air-cooled
Rated power	1.5kw/6500rpm	4.0kw/6500rpm
Displacement	53.2cc	196cc
Transom height	400mm	400mm
Propeller Range	3-7inch	3-7inch
N.W/G.W	12.5/13.5kgs	30/32kgs


Gasoline Hammer
TM-HM52A



Gasoline Hammer
TM-HM435



Model No.	TM-HM52(Gasoline Hammer)	TM-HM435(Gasoline Hammer)
Engine model	1E44F-5A	GS35
Engine type	2-Storke air-cooled	4-Storke air-cooled
Rated power	1.8kw/6500rpm	1.1kw/6500rpm
Displacement	51.7cc	35.8cc
Max torque	3.5N.M	3.5N.M
Impact Frequency	1500BPM	1500BPM
N.W/G.W	18.0/20.0kgs	18.0/20.0kgs

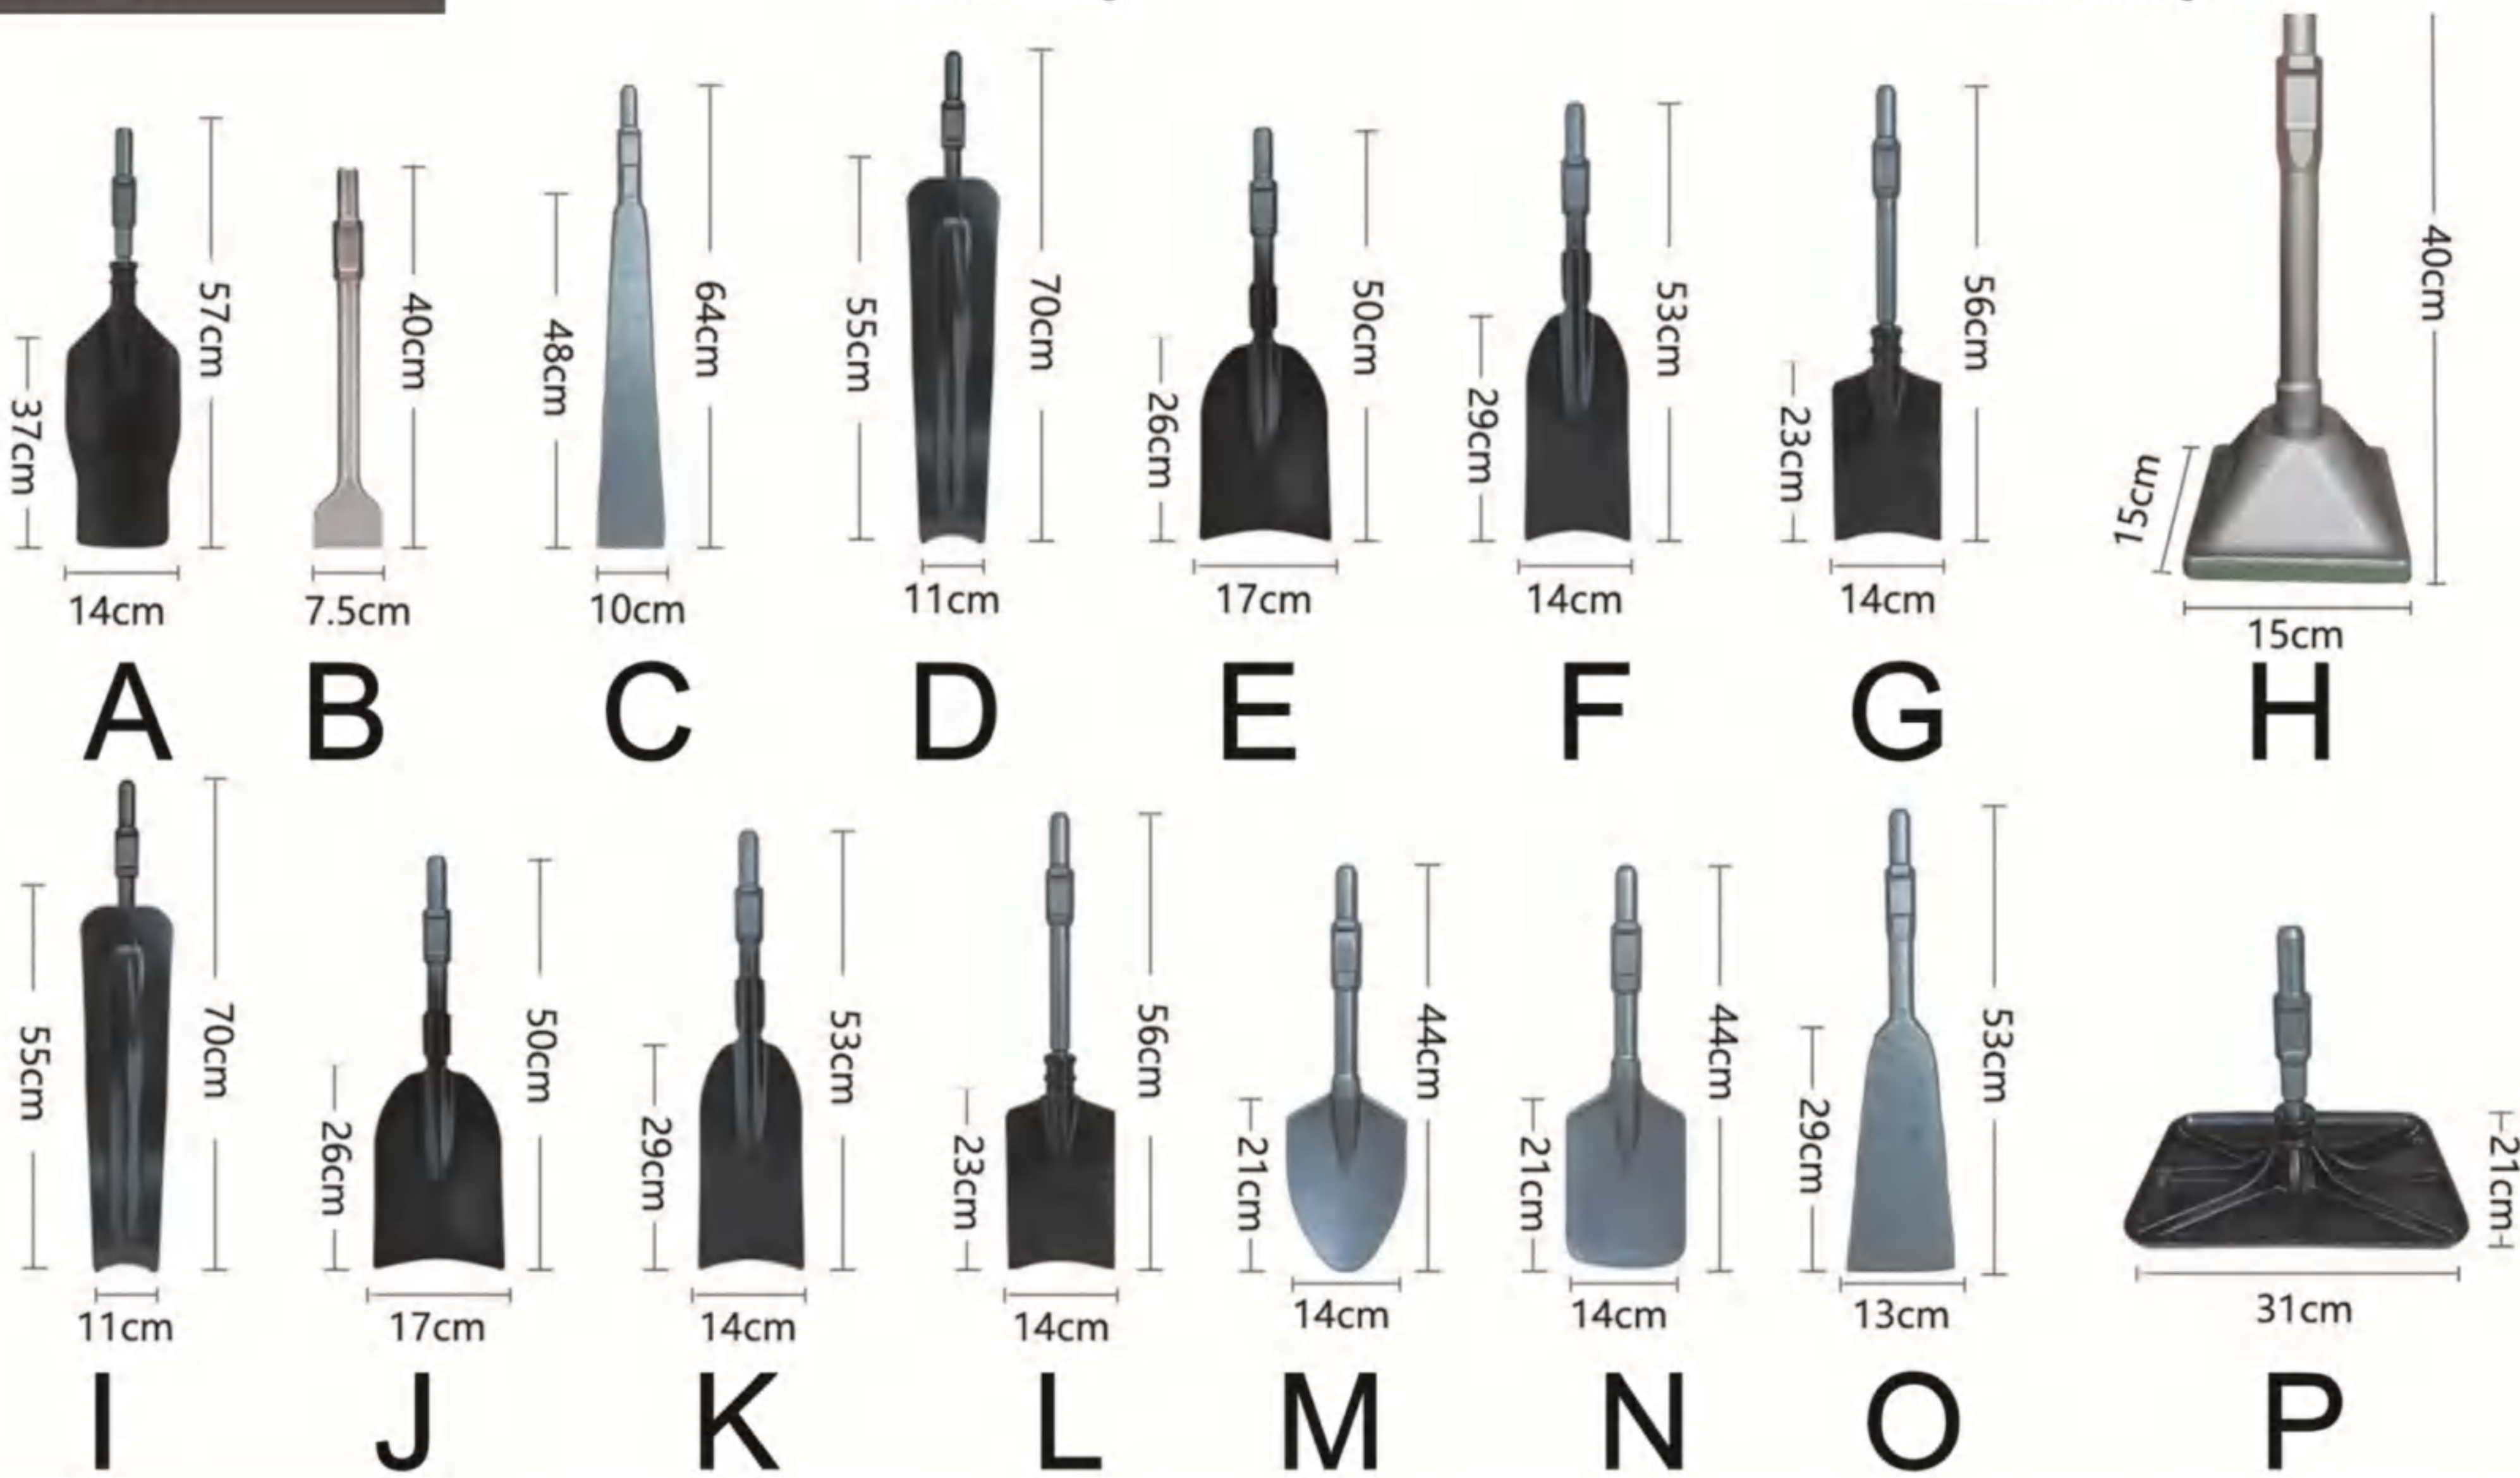

Gasoline Hammer Driller TM-HD52



Gasoline Hammer Driller TM-HD435



Model No.	TM-HD52(Gasoline Hammer Driller)	TM-HD435(Gasoline Hammer Driller)
Engine model	1E44F	GS35
Engine type	2-Stroke air-cooled	4-Stroke air-cooled
Rated power	1.8kw/6500rpm	1.1kw/6500rpm
Displacement	51.7cc	35.8cc
Max torque	1.5N.M	1.5N.M
Impact Frequency	3200BPM	3200BPM
N.W/G.W	10.5/11.5kgs	10.5/11.5kgs

Gasoline Pile Hammer TM-PH52



Gasoline Cut Off Saw TM-CM52



Model No.	TM-PH52 (Gasoline Pile Hammer)	TM-CM52(Gasoline Cut off saw)
Engine model	1E44F	1E44F
Engine type	2-Stroke air-cooled	2-Stroke air-cooled
Rated power	1.8kw/6500rpm	1.8kw/6500rpm
Displacement	51.7cc	51.7cc
Max torque	1.5N.M	3.5N.M
Impact Frequency	3000BPM	350mm
Impact energy	20-50J	120mm



TM-EBC6202

Model No.	TM-EBC6202
Rated Power	1 600-2000W
Voltage	110/220V
Frequency	50/60Hz
No-load Speed	9000rpm
Max Cutting Width	420mm
Shaft	26mm
N.W./G.W	6.0/7.0kgs



TM-EBC6203

Model No.	TM-EBC6203
Rated Power	1 600-2000W
Voltage	110/220V
Frequency	50/60Hz
No-load Speed	9000rpm
Max Cutting Width	420mm
Shaft	26mm
N.W./G.W	6.0/7.0kgs



TM-EBC6204

Model No.	TM-EBC6204
Rated Power	1 600-2000W
Voltage	110/220V
Frequency	50/60Hz
No-load Speed	9000rpm
Max Cutting Width	420mm
Shaft	26mm
N.W./G.W	6.0/7.0kgs



TM-EBC6205

Model No.	TM-EBC6205
Rated Power	1 600-2000W
Voltage	110/220V
Frequency	50/60Hz
No-load Speed	9000rpm
Max Cutting Width	420mm
Shaft	26mm
N.W./G.W	6.0/7.0kgs



TM-ECS405A



TM-ECS5018

Model No.	TM-ECS405A	TM-ECS5018
Voltage	110/220V	110/220V
Frequency	50/60Hz	50/60Hz
Rated Power	1600W	1800W
Cutting capacity	16"(40cm)	16"(40cm)
Chain Pitch	3/8"	3/8"
Automatic oil Lubrication	Yes	Yes
Tool free chain adjustment	Yes	Yes



TM-ECS8011

TM-ECS6011



TM-ECS6023



Model No.	TM-ECS6011	TM-ECS6023	TM-ECS8011
Voltage	110/220V	110/220V	110/220V
Frequency	50/60Hz	50/60Hz	50/60Hz
Rated Power	2000W	2000W	2400W
Cutting capacity	16"(40cm)	16"(40cm)	18"(45cm)/20"(50cm)
Chain Pitch	3/8"	3/8"	3/8"
Automatic oil Lubrication	Yes	Yes	Yes
Tool free chain adjustment	Yes	Yes	Yes

TM-EB8011



Model No.	TM-EB8011
Voltage	110v/220v
Frequency	50/60Hz
Rated Power	3000w
No-load Speed	15000rpm
Max Air Speed	275km/h
Max Air Volume	13.5m³/min

TM-EHT510



Model No.	TM-EHT510
Voltage	110v/220v
Frequency	50/60Hz
Rated Power	500w
No-load Speed	1700rpm
Max Cutting Length	510mm
Max Cutting Diameter	16mm

TM-EHT550



Model No.	TM-EHT550
Voltage	110v/220v
Frequency	50/60Hz
Rated Power	550w
No-load Speed	15000rpm
Max Cutting Length	550mm
Max Cutting Diameter	20mm

TM-EHT610



Model No.	TM-EHT610
Voltage	110v/220v
Frequency	50/60Hz
Rated Power	700w
No-load Speed	15000rpm
Max Cutting Length	610mm
Max Cutting Diameter	24mm


TM-SD9021

Model No.	TM-SD9021
Voltage/Frequency	220-230V/50Hz
Rated Power	2600w
No-load speed	4500rpm
Max cutting dia	45mm
Collect capacity	45L(PE Collection bag)

Model No.	TM-SD9022
Voltage/Frequency	220-230V/50Hz
Rated Power	2800w
No-load speed	4500rpm
Max cutting dia	45mm
Collect capacity	50L(PP Collection bin)

TM-SD9022

TM-SD9023

Model No.	TM-SD9023
Voltage/Frequency	220-230V/50Hz
Rated Power	2800w
No-load speed	4500rpm
Max cutting dia	45mm
Collect capacity	50L(PP Collection bin)



wechat

www.teamaxpower.com



website



TEAMAX
— POWER PRODUCTS —

FUZHOU TEAMAX POWER TECHNOLOGY CO.,LTD

Factory 1: No.58 Juyuanzhou Industrial Park Fuzhou, China

Tel: +86-591-83054667 Fax: +86-591-83054667

Factory 2: NO.9 Xita Road, Chengxi Industrial Park Yongkang, Zhejiang, China

Email: manager@teamaxpower.com

Mobile: +86-13600850700 (wechat/whatsapp)